

A. Input Characteristics:


- 1) Voltage: 200-250VAC
- 2) Frequency: 50/60 Hz.
- 3) Line Current: 16A Maximum
- 4) Load Capacity: 3.68 KVA
- 5) Overload Protection: (1) 2P/16A UL489 Circuit Breaker
- 6) Power Cord: NONE
- 7) Connector: IEC 60320C20
- 8) Indicator: Power-on, LED

B. Output Characteristics:

- 1) Voltage: 200-250VAC
- 2) Current: 16A (Total Combined Load)
- 3) Outlets: 12X IEC C13

C. Mechanical Characteristics:

- 1) Material: CRS
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Lettering: Silk-Screen, White/Epoxy
- 4) Storage Temp.: -(13) - 149F (-25 - 65C)



C13 INPUT

D. Operating Environment:





- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)

E. Regulatory Conformance:

- 1) Safety Agency: UL/cUL, UL60950-1, CE
- 2) RoHS: Compliant to Directive 2002/95/EC



1.691 in [42.9 mm]

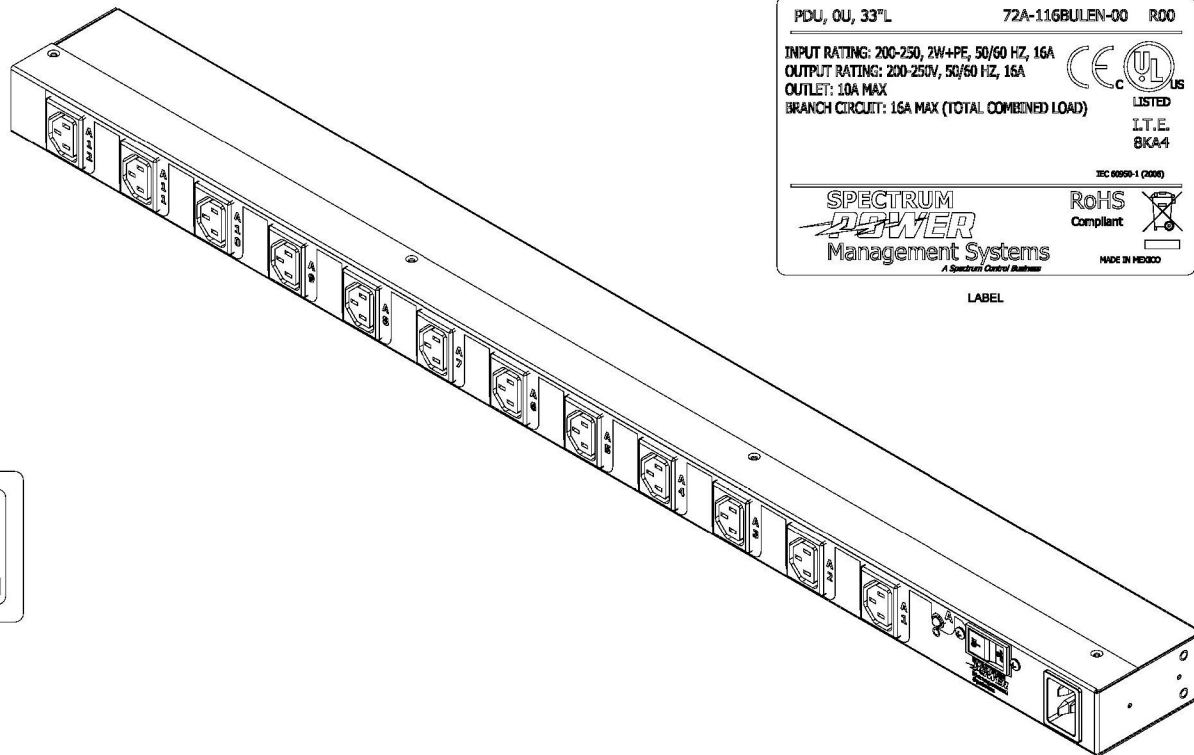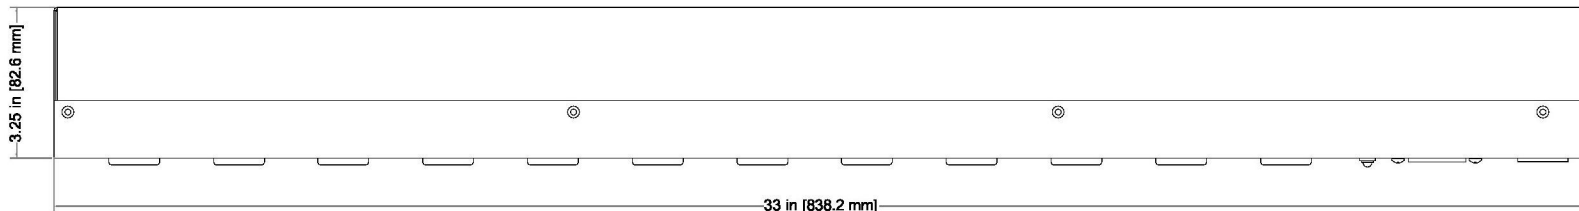

PDU, 0U, 33"L 72A-116BULEN-00 R00

INPUT RATING: 200-250, 2W+PE, 50/60 HZ, 16A
 OUTPUT RATING: 200-250V, 50/60 HZ, 16A
 OUTLET: 10A MAX
 BRANCH CIRCUIT: 16A MAX (TOTAL COMBINED LOAD)

UL LISTED I.T.E. 8KA-4
 IEC 60950-1 (2006)

SPECTRUM POWER Management Systems
 A Spectrum Control Network

RoHS Compliant
 MADE IN MEXICO

LABEL



40243-ENG CHANGE NOTICE	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.6M-1994		TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ± .010 ANGLES ± 0°30'		
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.				
	DRAWN: CarrS		DATE: 2/22/2008	SHEET: 1 OF 1	CODE IDENT NO: