

**A. Input Characteristics:**

- 1) Voltage: 100-127VAC
- 2) Frequency: 50/60 Hz.
- 3) Line Current: 20A Maximum
- 4) Load Capacity: 2.40 KVA
- 5) Overload Protection: (1) 1P/20A UL489 Circuit Breaker
- 6) Power Cord: 10' (3m), #12AWG/3C
- 7) Connector: NEMA L5-20P
- 8) Indicator: Power-on, LED

**B. Output Characteristics:**

- 1) Voltage: 100-127VAC
- 2) Current: 20A (Total Combined Load)
- 3) Outlets: 12X NEMA 5-20R

**C. Mechanical Characteristics:**


- 1) Material: CRS
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Lettering: Silk-Screen, White/Epoxy
- 4) Storage Temp.: -(13) - 149F (-25 - 65C)

**D. Operating Environment:**



- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)

**E. Regulatory Conformance:**




- 1) Safety Agency: UL/cUL, UL60950-1, CE
- 2) RoHS: Compliant to Directive 2002/95/EC



**L5-20P PLUG END**

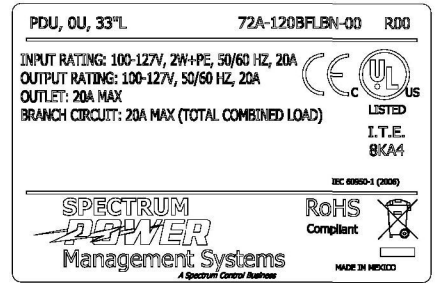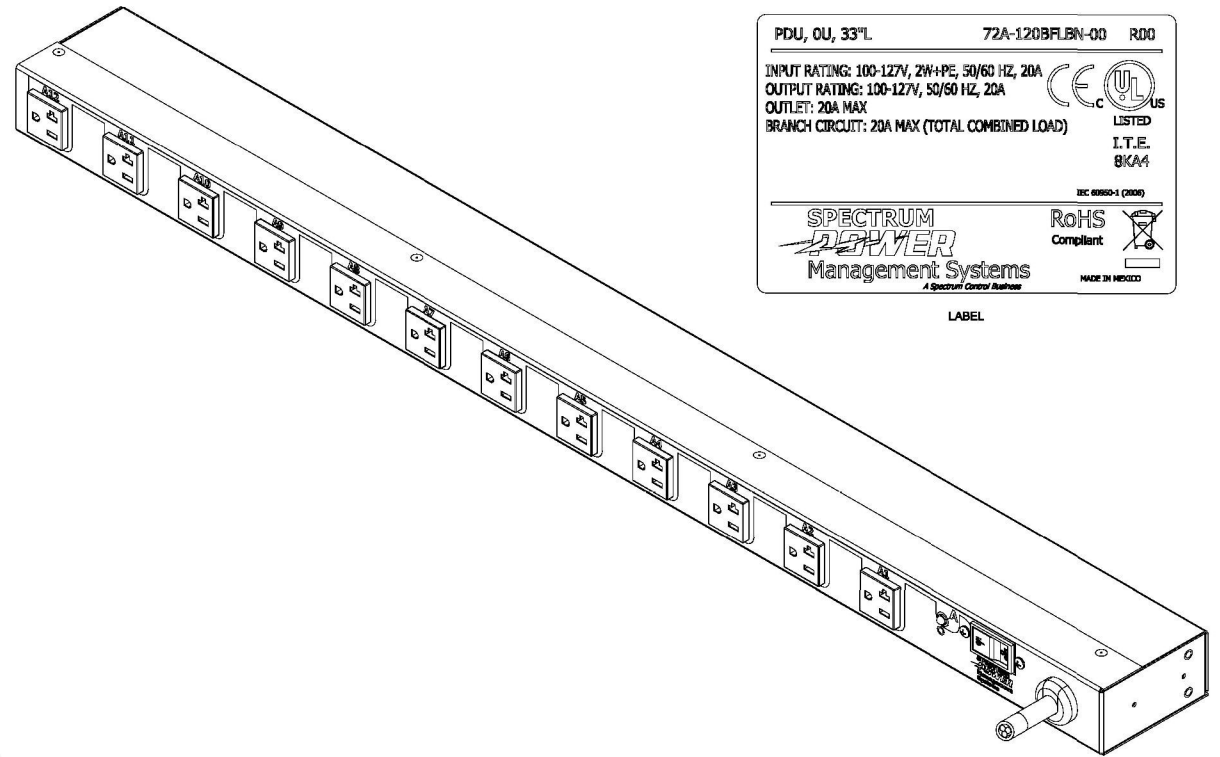

LABEL

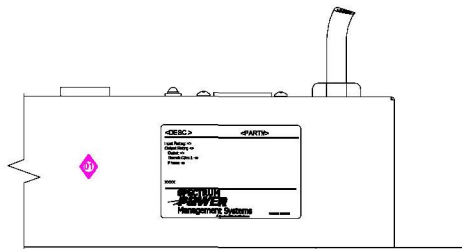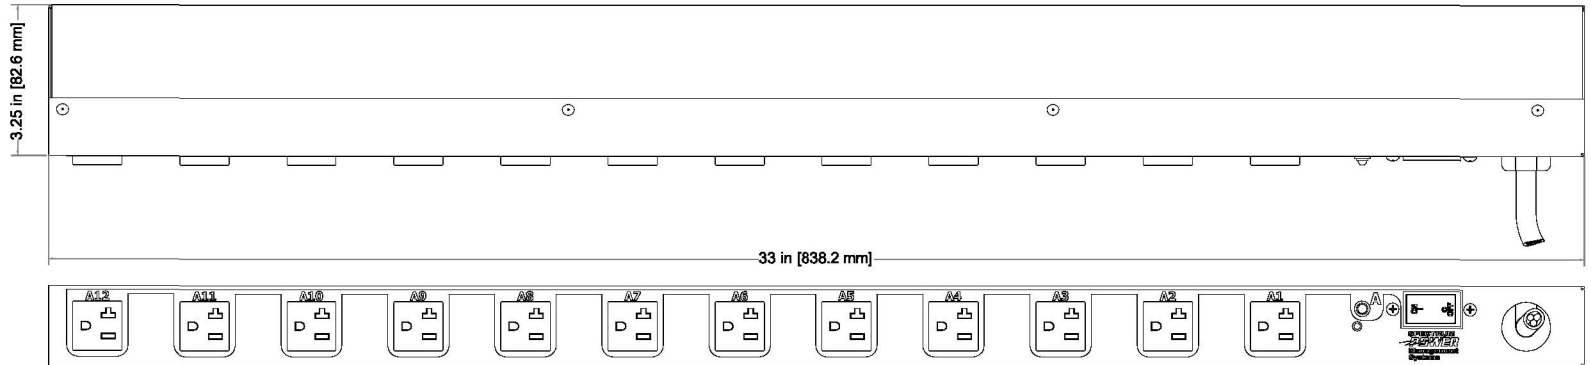

**SIDE VIEW  
(LABEL PLACEMENT)**



42204-ENG	1	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994  THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED, EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES. SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.	TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ± 0.010 ANGLES ± 0°30'	THIRD ANGLE PROJECTION		Spectrum Management Systems 12X 5-20R, 1 BREAKER, 0U PDU 72A-120BFLBN-00
	CHANGE NOTICE			DRAWN: CarrS DATE: 2/22/2008 SHEET: 1 OF 1	CODE IDENT NO:	