A. Input Characteristics:

1) Voltage: 200-250VAC

2) Frequency: 50/60 Hz.

3) Line Current: 20A Maximum

4) Load Capacity: 4.6 KVA

5) Overload Protection: (1) 2P/20A UL489 Circuit Breaker

6) Power Cord: 10' (3m), #12AWG/3C

7) Connector: NEMA L6-20P

8) Indicator: Power-on, LED

B. Output Characteristics:

1) Voltage: 200-250VAC

2) Current: 20A (Total Combined Load)

3) Outlets: 12X IEC C13

C. Mechanical Characteristics:

1) Material: CRS

2) Finish: Powder Coat, Black, Fine Texture

3) Lettering: Silk-Screen, White/Epoxy

4) Storage Temp.: -(13) - 149F (-25 - 65C)

D. Operating Environment:

1) Temperature: 32 - 122F (0 - 50C)

2) Relative Humidity: 0 - 95% (Non-Condensing)

3) Elevation: 0 - 10,000FT (0 - 3000 m)

E. Regulatory Conformance:

1) Safety Agency: UL/cUL, UL60950-1, CE

2) RoHS: Compliant to Directive 2002/95/EC

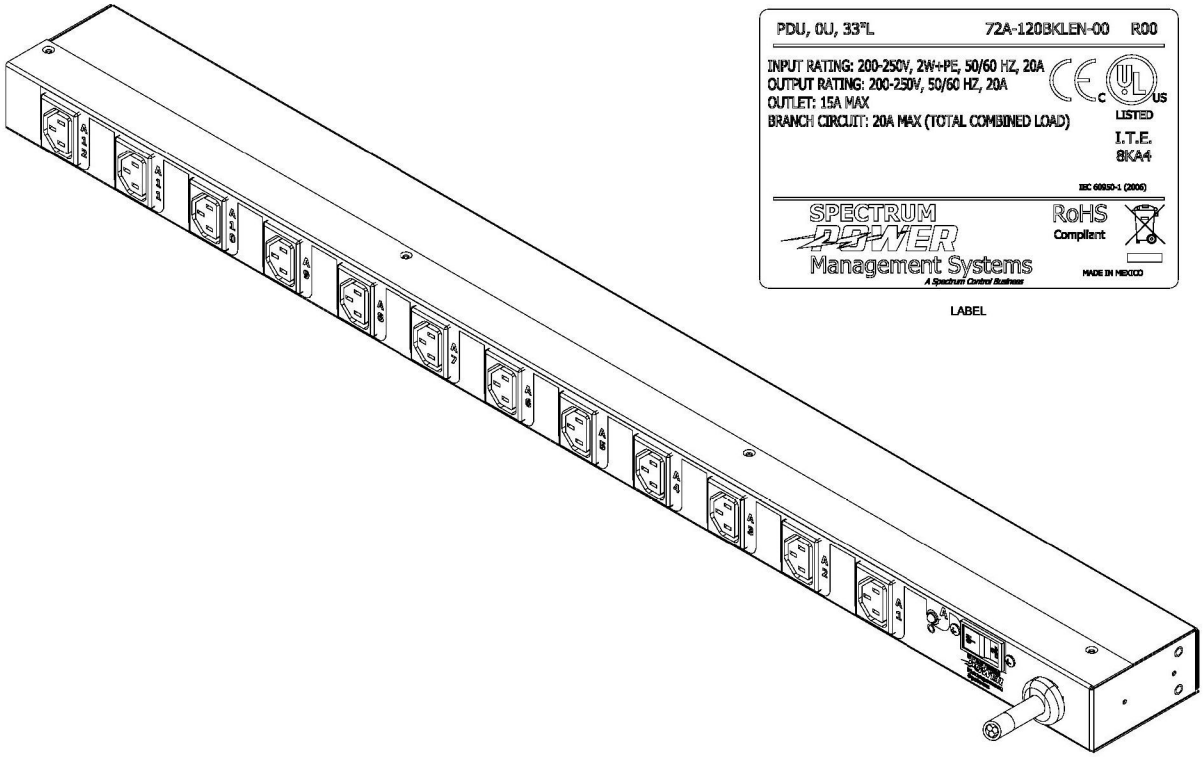

LABEL



L6-20P PLUG END

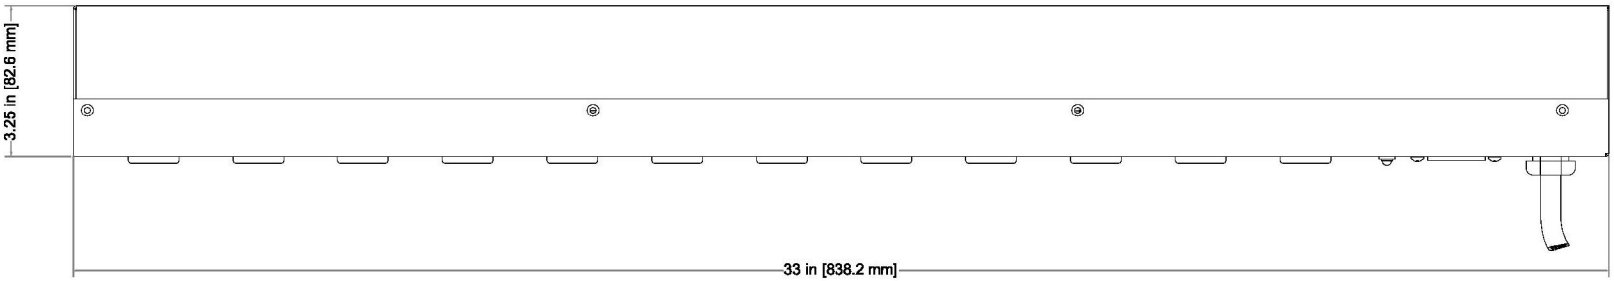





i-TECH COMPANY
Industrial Display Solution

40243-ENG 0 CHANGE NOTICE REV	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.	TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ±.010 ANGLES ± 0°30' THIRD ANGLE PROJECTION	Spectrum POWER Management Systems		
			12X C13, 1 BREAKER, 0U PDU		
			72A-120BKLEN-00		
	DRAWN: CarrS	DATE 2/22/2008	SHEET: 1 OF 1	CODE IDENT NO:	STATE COLLEGE, PENNSYLVANIA