

A. Input Characteristics:

- 1) Voltage: 100-127VAC
- 2) Frequency: 50/60 Hz.
- 3) Current: 20A Maximum
- 4) Load Capacity: 2.40 KVA
- 5) Overload Protection: EXTERNAL INPUT PROTECTION REQUIRED
- 6) Power Cord: NO
- 7) Connector: IEC 60320 C20

B. Output Characteristics:

- 1) Voltage: 100 - 127 VAC
- 2) Current: 20A COMBINED LOAD
- 3) Outlets: 10X NEMA 5-20R

C. Mechanical Characteristics:



- 1) Material: CRS
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Lettering: Silk-Screen, White/Epoxy
- 4) Storage Temp.: -(13) - 149F (-25 - 65C)

D. Operating Environment:


- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)

E. Regulatory Conformance:

- 1) Safety Agency: UL/cUL, UL60950-1
- 2) RoHS: Compliant to Directive 2002/95/EC

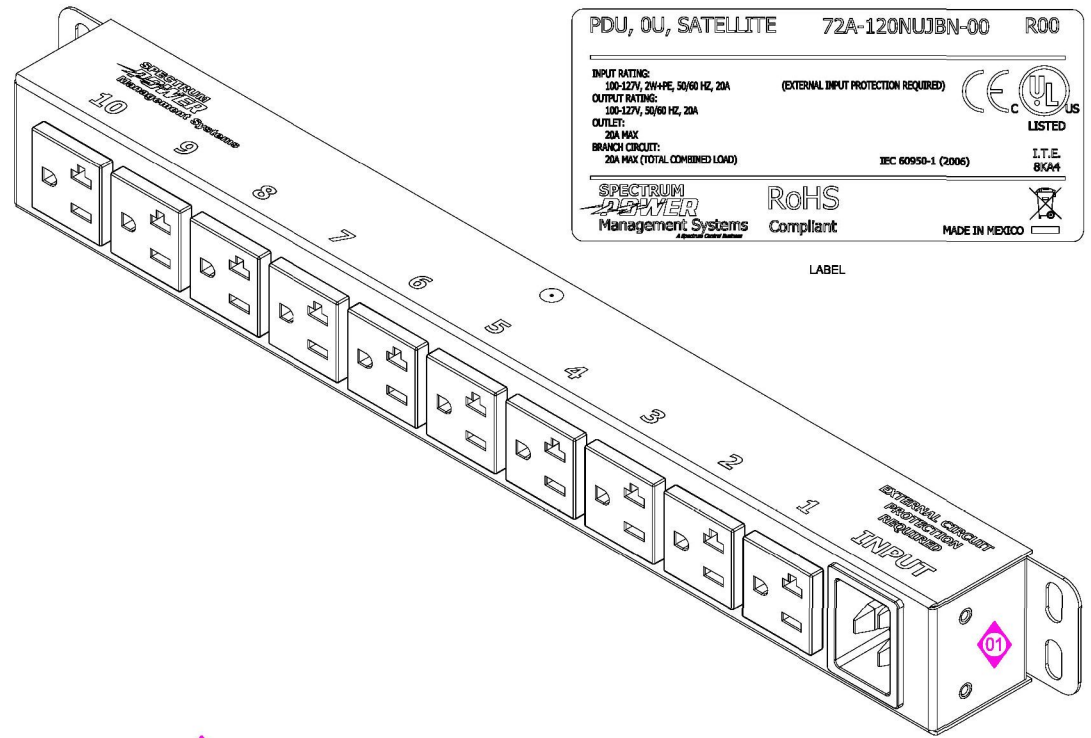

C20 INPUT

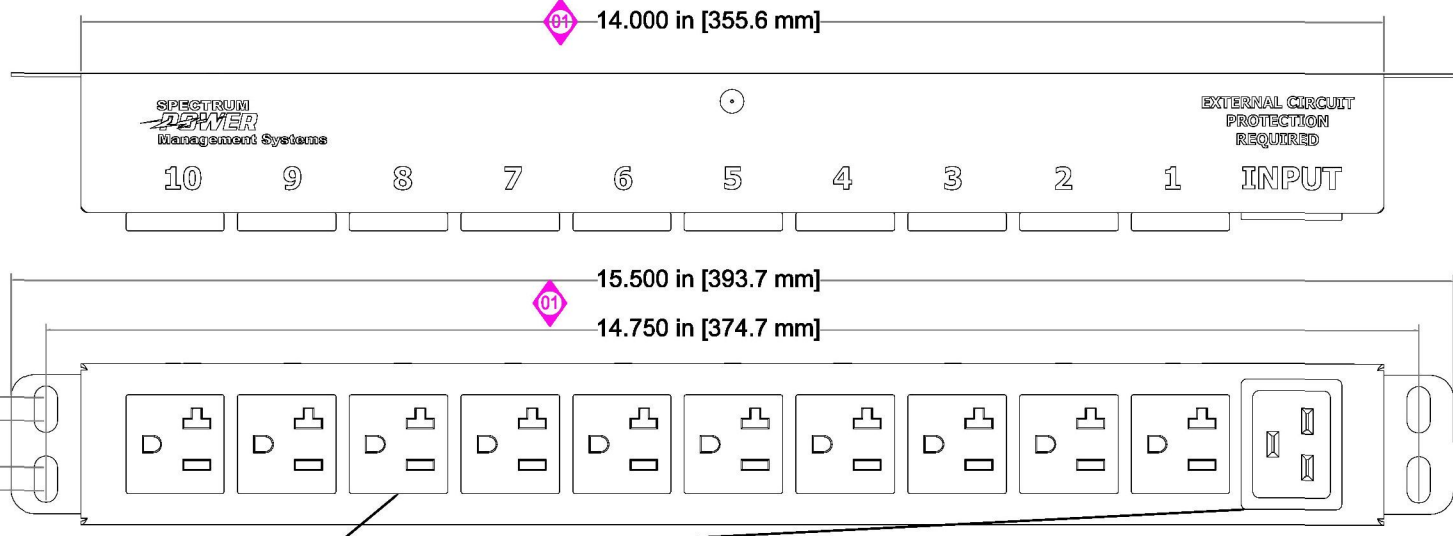


1.000 in [25.4 mm]

.500 in [12.7 mm]

NEMA 5-20R OUTLETS, 10 TOTAL

1X IEC C20

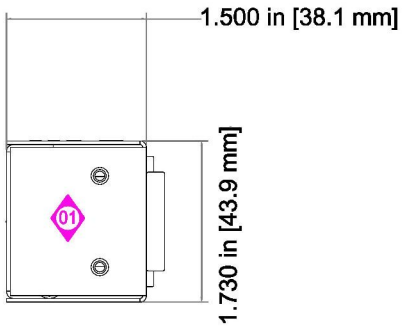

41575-ENG CHANGE NOTICE	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.6M-1994		TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ± 0.010 ANGLES ± 0°30'		
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED, EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.				
DRAWN: CarrS		DATE: 2/22/2008		SHEET: 1 OF 1	
CODE IDENT NO:		STATE COLLEGE, PENNSYLVANIA		10X 5-20R SATELLITE PDU 72A-120NUJBN-00	

