


# INDUSTRIAL METAL CHASSIS WIDESCREEN

43" LCD monitor, 3840 x 2160 ( 4K ) / 700 nits, DVI+VGA +HDMI  
100~240VAC power code + Normal AR Glass Front IP65 with IP54 rear Housing

**Model: CCHW4300G-4K**

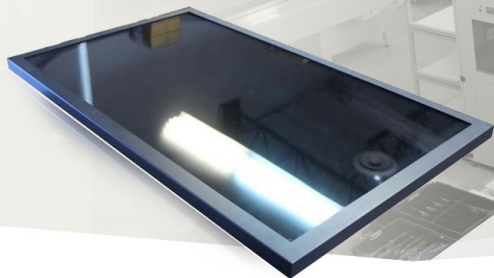

## FEATURES:



- High Contrast Monitor with resolution up to (3840x2160)
- Modern & Customized Design
- Best sensitivity multi-touch : Projected Capacitive Touch
- High Shock & Vibration Resistance
- Widely Application: Automation, Medical, Tourist, Education...

## SPECIFICATIONS:

<b>Panel</b>	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	Wide / 43" viewable diagonal area	
	Active Area / Pixel Pitch	962.0 (H) x 554.8 (V) mm / 0.2451 mm x 0.2451 mm	
	Native Resolution / Colors	3840(H) x 2160(V) / 1.06B	
	Brightness / Contrast	700 cd/m <sup>2</sup> (typ) / 1000 : 1	
	Response Time	< 12ms	
	Viewing Angle (typical)	H.178° (- 89° ~ + 89°) , V. 178° (- 89° ~ + 89°)	
	Light Source	LED backlight, Long life, 35,000 hrs (typ)	
<b>Input Sources</b>	PC System	Signal	Analog RGB (0.7/1.0 V <sub>p-p</sub> , 75 ohms)
		Sync	Separate Sync, Composite Sync, Sync On Green
		Frequency	F <sub>H</sub> : 30 - 82Khz , F <sub>V</sub> : 50 -75Hz
	Audio System	2W speaker x 2	
<b>Input Terminals</b>	1 x VGA , 5 x HDMI, 1 x DP , 1 x PC Audio (Stereo Headphone Jack) , 1 x DC Power Plug		
<b>Convenient Features</b>	Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B)		
	OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing)		
<b>Power</b>	Internal power supply with universal / Auto-Sensing, AC100 to 240V, 50/60 Hz		
<b>Power Consumption</b>	Operation / Power Saving	141.25 watt , < 1 watt (Support DPMS)	
<b>Operating Condition</b>	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)	
<b>Storage Condition</b>	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F) , 10% ~ 90% (no condensation)	
<b>Certification</b>	FCC , CE		
<b>Dimensions</b>	Physical	Please refer to Drawing	
	Carton	W x H x D = TBD	
<b>Weight</b>	N.W. / G.W.	30.5 Kgs / 32.5 Kgs	
<b>Container Loaded</b>	20ft / 40ft / 40ft HQ	TBD (Sets , By pallet)	

## APPLICATIONS:



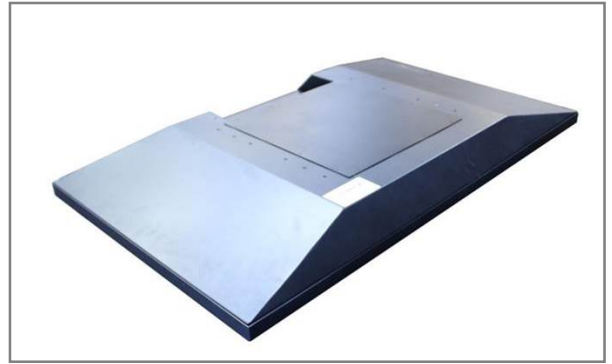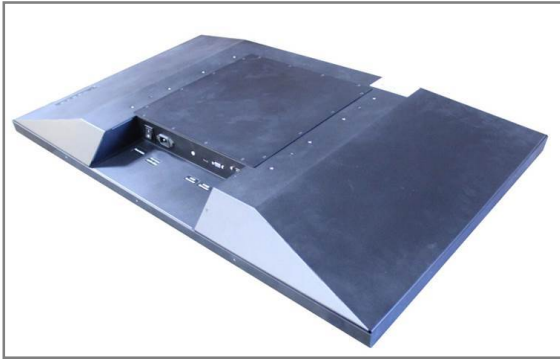

**MECHANICAL DRAWING:**

