




Specifications

Model Name	WCH1040A1
Viewable Size image	10.4"
Active Display Area (mm)	211.2(H)x158.4(V)
Pixel Pitch(mm)	0.264 (H) x 0.264 (V)
Number of Pixels	800x600
Contrast Ratio	500:1(typ.)
Display Colors	16.2M (8bits/color)
Brightness(cd/m)	400
Viewing Angle(CR>=10)	-80~80 (H); -60~80 (V)
Synchronization Range Horizontal/Vertical	31.5~46.9KHz / 60~75Hz
Recommended Resolution	800 x 600@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW, IR



Remarks: WCH1040A1 series= VGA input only
WCH1040A1AV series= VGA+Video Input

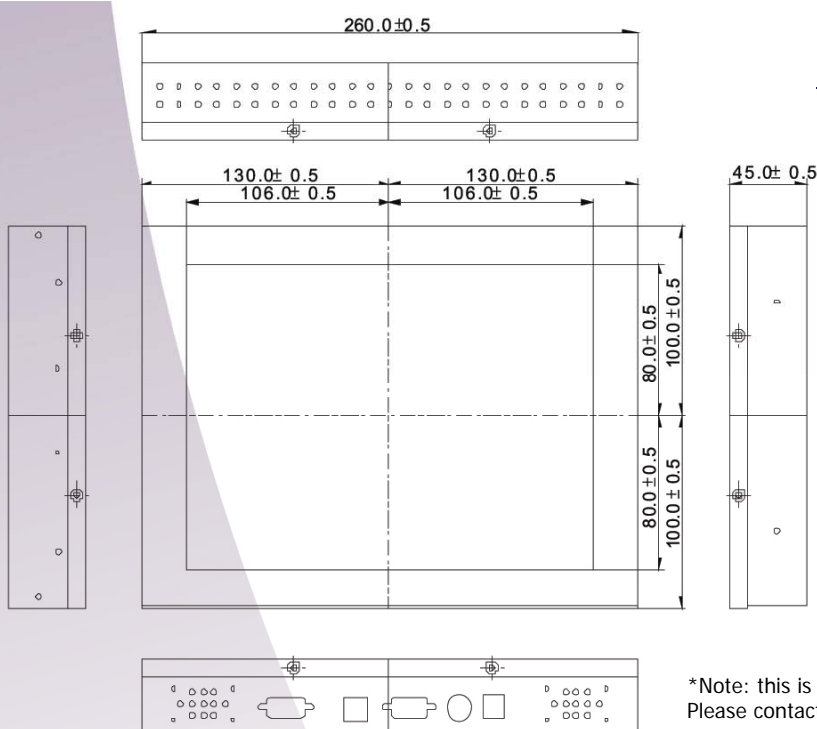

MECHANICAL DRAWING

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com