

Fanless Panel PC with Touchscreen

15" Fanless Panel PC IP65 Front with Resistive Touch Screen, MainBoard, 12V DC Adapter, Intel Atom™ processor D525 1.86GHz, 2W AMP Stereo Speaker, w/84W power Adapter, CF, 1 x mini PCI, 6 x COM, 6 x USB2.0, resolution 1024 x 768, 350cd/m2 brightness, panel mounting Kit 41.5 x 32.0 x 5.7 cm Optional: VESA mount kit and Wireless module

(Model: BMPC1500AT3)



Features

- » Fanless, Aluminum Front Panel Design
- » 15" TFT Color Panel Display w/Touchscreen
- » Intel® Atom™ D525/D510 Processor
- » VGA, Gigabit Ethernet, Audio Port
- » 2W Stereo Speaker
- » 1 x 2.5" SATA HDD Space
- » 1 x CF, 1 x Mini PCI, 1 x Mini PCIe Socket
- » 4 x COM Port, 6 x USB2.0 Port, Parallel Port
- » COM Port Voltage Output
- » +12V DC In
- » Wireless LAN (Optional)

System

LCD

Size: 15"

Max. Resolution: 1024 x 768 Pixel

Brightness: 350 cd/m²

Contrast Ratio: 700:1

Max. Color: 16.2M/262K Color

Pixel Pitch: 0.297 x 0.297 mm

Touch Screen

15" Resistive

SBC

HS-8603

CPU

Intel® Atom™ D525/D510 Processor 1.8/1.6GHz

System Chipset

Intel® Pineview/ICH8-M

System Memory

2 x 200-Pin SO-DIMM, DDR2 800/667MHz, Max. 4GB

Display Interface

1 x D-SUB 15-pin

Audio Interface

Audio Jack for MIC In, Line Out

2W Amplifier with Stereo Speaker

Ethernet Interface

1 x RJ-45 for Gigabit Ethernet

1 x Mini PCI Wireless LAN Module (Optional)

Storage

1 x 2.5" SATA HDD Space

Expansion Interface

1 x Type III Mini PCI Socket

1 x Mini PCIe Socket

Watchdog Timer

Software Programmable Time-Out Intervals from 1~255 sec. or 1~255 min.

H/W Status Monitor

Monitoring Temperature, Voltage Status

Power

+12V DC In

Operating/Storage Temperature

0~45°C/-20~+70°C

Certification

FCC/CE Class A Compliance

IP65 Front Panel Protection Compliance

Dimensions

41.5(L) x 32.0(H) x 5.7(W) cm


Cut Out Size

36.4(L) x 28.2(H) cm

Accessory Options

Table Top Metal Stand, Wireless LAN Module

Photo Gallery

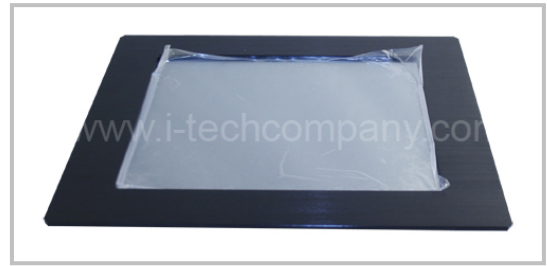

Mechanical Drawings (unit: cm)

