


Industrial Grade Panel PC with Touchscreen

17" Industrial Grade Panel PC w/ Touch screen,
HS-1755/GM45 Mini ITX, 150W Adapter

(Model: BMPC1700CHBT)

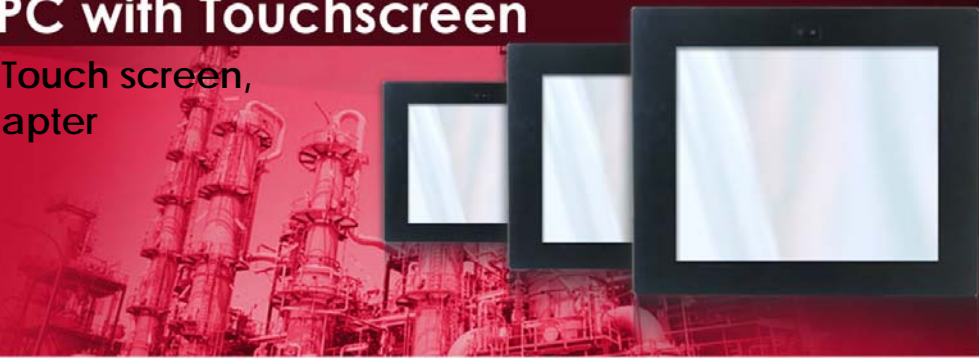

Features:

Aluminum front panel design
17" high brightness TFT color panel display
Built-in touch screen, HS-1755, 12V DC adapter
Provides Socket P for Intel Core™ 2 Duo processor
Onboard graphics, dual GB ethernet, audio controller
1 x 2.5" SATA HDD space
2 x 4cm ball bearing cooling fan
BPC-9317-O provides 4 x COM, 6 x USB2.0
Option for Wireless LAN module, open frame type

Display

LCD Size: 17"
Max Resolution: 1280 x 1024 pixels
Brightness (cd/m²): 800 cd/m² (LED Backlight)
Contrast Ratio: 800:1
LCD Color: 16.7M colors
Pixel Pitch (mm): 0.264 x 0.264
Touch Screen: 17" five-wire analog resistive


System

SBC Model: HS-1755
CPU: Socket P for Intel Core™ 2 Duo processor (option)
BIOS: Award
System Chipset: Intel GM45/ICH9-M
System Memory: 2 x DDR2 SO-DIMM, 667/800MHz FSB, max. 4GB
Display Chipset: Intel GM45 integrated GMA 4500MHD
Audio Chipset: Intel ICH9-M built-in HD audio w/Realtek ALC888 codec for 7.1CH
Ethernet Chipset: Intel ICH9-M integrated Intel 82567LM GB LAN, Intel 82574L PCI-E GB LAN for 2nd LAN, Provides Wireless LAN Module (option)
Drive Bay: 1 x 2.5" SATA HDD space
Watchdog Timer: 256 levels
Thermal System: 2 x 4cm ball bearing cooling fan
Dimensions (LxHxW): 45.0 x 37.0 x 8.46 cm
Cut Out Size (LxH): 40.0 x 31.8 cm
Operation/Storage Temperature: 0~+45 degrees C/-20~+70 degrees C
EMC: FCC/CE
Front Panel Protection: Meet IP65
Power Adapter: 12V DC in 150W adapter

I/O Interface

External I/O: 4 x COM, VGA, 2 x LAN, 6 x USB2.0, PS/2 KB, PS/2 MS, MIC In, Line In, Line Out, Side/Rear Surround, LFE

Rear I/O

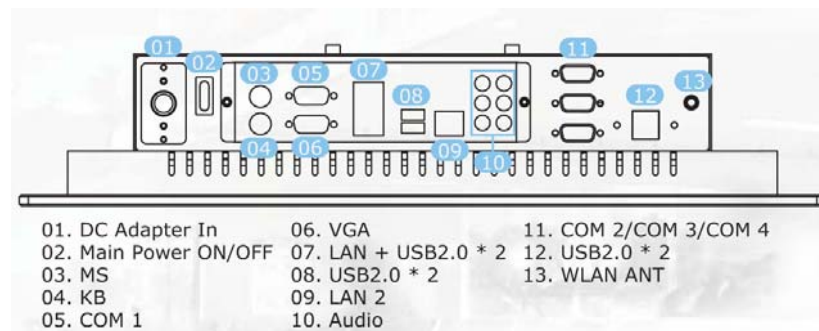

Accessories Options

Table Top Metal Stand, Memory Module, CF Module, Wireless LAN Module, 2.5" SATA HDD



