RUGGED COMPLETELY SEALED FULL IP66/NEMA4X STAINLESS STEEL CHASSIS/SURFACE MOUNT

20.1" Industrial Panel (LM201U05-SLL1) Stainless enclosure with Full IP66 / 1600x1200 / 1000nits with AR glass

MODEL: CCH2010HB-SIP



FEATURES:

- 20.1" Industrial Panel (LM201U05-SLL1) / 1600 x 1200 /
- Brightness 1000nits.
- Stainless Enclosure with Full IP66
- AR glass
- I/O (all connectors are waterproof connectors / Included 6ft long water proof cables)
- VGA, DVI and 100-240 VAC power cord

Display	Viewing Size Image	20.1"
	Active Display Area (mm)	410.50x 308.50mm
	Pixel Pitch (mm)	0.255 (H) × 0.255(∨)
	Resolution	1600 x 1200
	Contrast Ratio	800 : 1 (typ.)
	Color	16.7M (8bits/colors)
	Brightness	1000 cd/m²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1600 x 1200 @ 60Hz
	Signal Connector	VGA,DVI
Power	Source	100-240 VAC Input
	Consumption	60W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP ,IR
	High Brightness	YES
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
	10	AV,HDMI,DP


SP

*Specifications subject to change without notice, not responsible for typographical errors.



MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

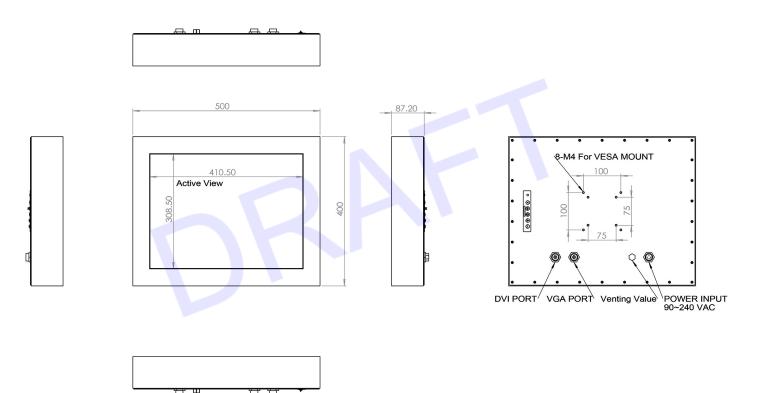

Drawing No.: CCH2010HB-SIP-03152023-V1

