

INDUSTRIAL OPEN FRAME LCD

7" 4:3 Open frame LCD Rear OSD with Rear Housing
400nits TFT LCD, 800x480,VGA + DVI Input

Model: COP0700



FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to VGA(800x 480)
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting application.
- Heavy duty Monitor with steel frame.



SPECIFICATIONS:

Display	Viewing Size Image	7"
	Active Display Area (mm)	152.4(H) x 91.44 (V)
	Pixel Pitch (mm)	0.1905(H)x0.1905(V)
	Resolution	800 x 480
	Contrast Ratio	500 : 1 (typ.)
	Color	R.G.B Stripe
	Brightness	400 cd/m ²
	Viewing Angle	-80~80 (H) ; -60~80(V)
	Recommended Resolution	800 x 600 @ 60Hz, 75Hz
	Signal Connector	VGA,DVI
Power	Source	12V DC in, with External AC-DC Adapter(100-240V)
	Consumption	8W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

APPLICATIONS:



MECHANICAL DRAWING:

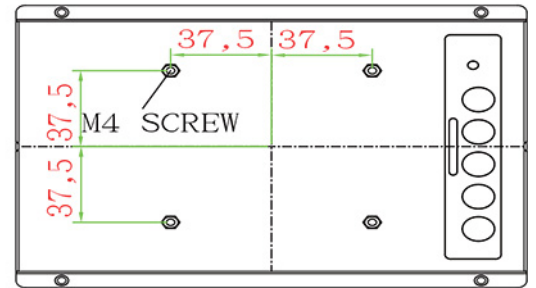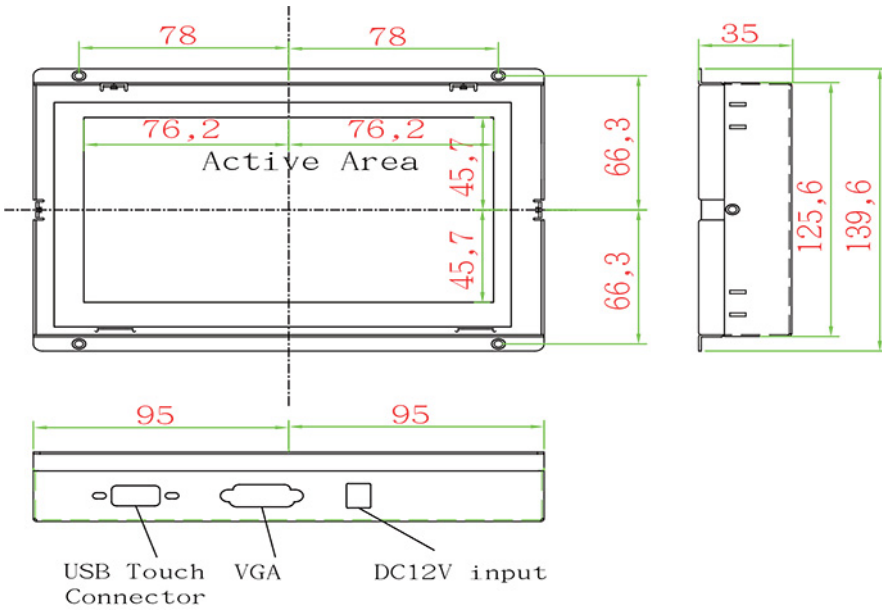

UNIT : mm