


INDUSTRIAL OPEN FRAME LCD

12.1" Open frame LCD Rear OSD with Rear Housing
450nits TFT LCD, 800x600, VGA + DVI Input

Model: COP1210

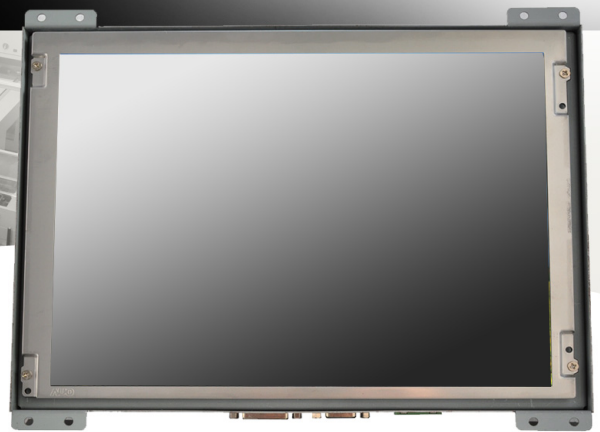

FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to SVGA(800x600)
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting application.
- Heavy duty Monitor with steel frame.

SPECIFICATIONS:

Display	Viewing Size Image	12.1"
	Active Display Area (mm)	246.0 (H) x 184.5 (V)
	Pixel Pitch (mm)	0.3075 x 0.3075
	Resolution	800 x 600
	Contrast Ratio	700 : 1 (typ.)
	Color	262,144K
	Brightness	450 cd/m ²
	Viewing Angle	-80~80 (H) ; -65~75 (V)
	Recommended Resolution	800 x 600 @ 60Hz, 75Hz
	Signal Connector	VGA,DVI
Power	Source	12V DC in, with External AC-DC Adapter(100-240V)
	Consumption	15W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

APPLICATIONS:



MECHANICAL DRAWING:

