


Model: CPM1500-TRB

15" Panel Mount LCD Touch Screen Monitor

CPM1500 is an Industrial Front panel-mount touch screen LCD monitor utilizing a 15" diagonal color TFT LCD as display panel and a resistive touchscreen as input device. Panel Mount Touch Screen communication to CPU is RS232 or USB. Video input is VGA. Our added value services include integration of other types of panel mount touch screen such as digital resistive, eight-wire analog as well as add-ons such as environmental gaskets, anti-vandalism overlays and EMI/ESD shielding. Please contact our sales department for our custom packaging services. Optional 12VDC power supply with appropriate connectors is available and recommended.

DISPLAY SPECIFICATIONS	
Display Size	15.0" Diagonal 304.1(H)x228.1(V)mm
Brightness	250 cd/m ²
Contrast Ratio	300 : 1
Display Colors	16.7M (true)
Number of Pixels	1024 x 768
Pixel Arrangement	RGB Vertical Stripe
Pixel Pitch	0.297(H) x 0.297(W)
Display Mode	Normally White
Viewing Angle	70/70/55/65
Interface	VGA
Response Time	25ms
Backlight	4 CCFT
Outline Dimension (W x H x D)	331.6 x 255.3 x 18 mm
Weight	1800 g
Power Supply Voltage	-0.3 min. +21 max.
Operating Temperature	0 to +50° C
Storage Temperature	-25 to +60° C

Mechanical Drawing (2-1)

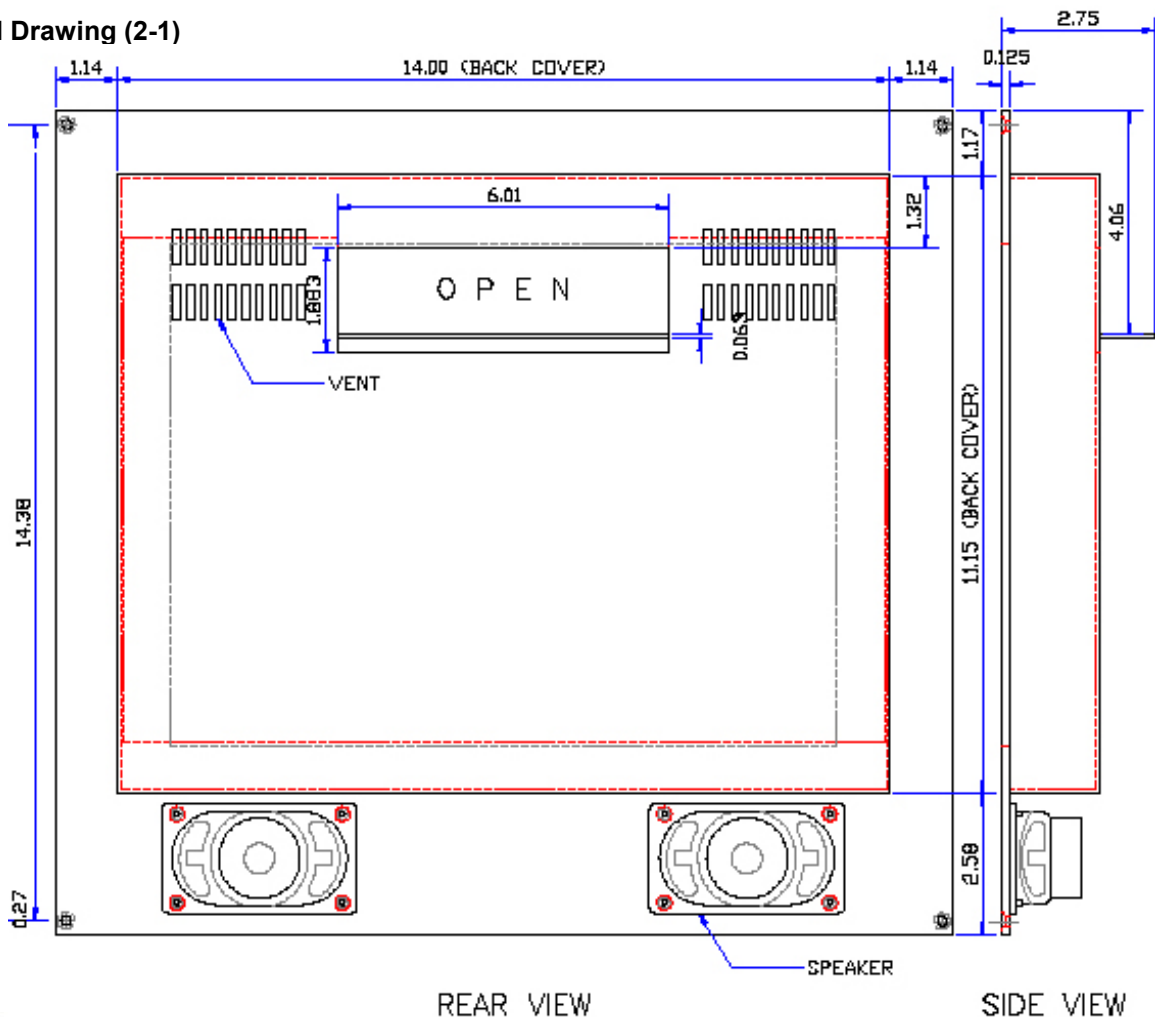



Model: CPM1500-TRB

15" Panel Mount LCD Touch Screen Monitor

Mechanical Drawing (2-2)

