


IP66 STAINLESS STEEL MONITOR

Rugged 12.1" industrial Panel PC, IP66 fully sealed, 1024 x 768, 500nit, 5 wire Resistive touch screen, Intel Celeron J1900 2.0GHz, 2GB DDR3L, 128GB SSD, IP67 I/O: USB x 3, RS232 x 1, RS485 x 1, CAN bus(DB9) x 1, DC9~36V input x 1, VESA mount, operating temperature: 0~50C

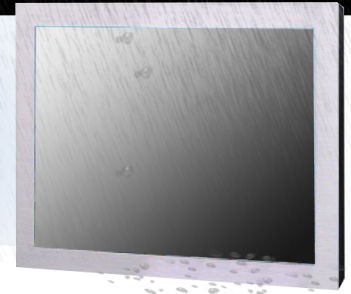

ECHW1210-SIP-J-CAN

FEATURES:

- Fanless 316 Stainless Steel IP66 Waterproof Panel PC
- Built-in Intel Celeron Processor J1900 Processor
- Resistive Touch Screen




SPECIFICATIONS:

Display	Size/Panel Type	12.1" TFT LCD Panel
	Resolution	1024 x 768
	Brightness (cd/m ²)	500 cd/m ²
	Contrast Ratio	700:1
	Response Time	35ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	160°/140°
Touch Screen	Touch Screen Type	Resistive Touch Screen
	Surface Hardness	3H
Environment	Operating Temperature	0°C~+50°C
	Storage Temperature	-20°C~+60°C
	Humidity	10%~95% RH (Non-Condensing)
	Waterproof Rating	IP66/NEMA4X, 6 Side Waterproof
Power	Power Input	DC9~36V Input
	Power Consumption	50W
Mechanical	Mounting	VESA Mount
	Dimension/Weight	294mm (W) x 224.5mm (H) x 70mm (D) / 4kgs
	Housing Material / Color	316 Stainless Steel / Silver
System	Processor/ Memory	Intel Celeron J1900 Processor / 2GB DDR3L
	Storage	128GB SSD
	IP67 I/O Interface	USB x 3, RS232 x 1, RS485 x 1, CAN bus(DB9) x 1, LAN x 1, DC in x 1
	Certification	FCC/CE/RoHS Compliance

ACCESSORIES

- DB9Cable x 3
- LAN Cable x 1
- Power Cable x 1

MECHANICAL DRAWING

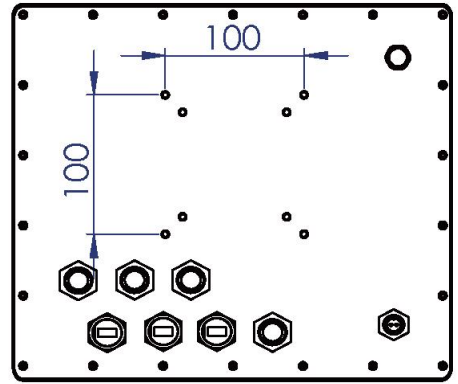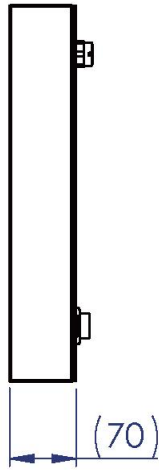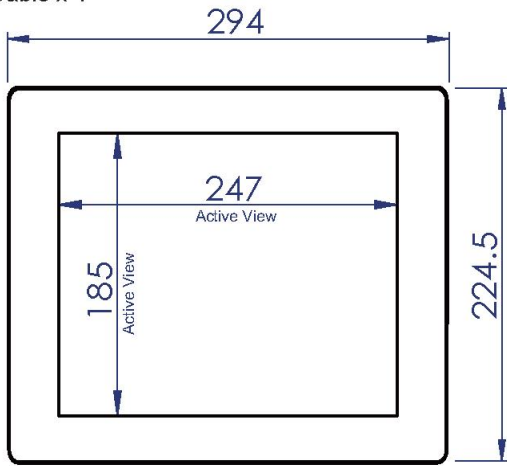

Unit: mm