

USB 3.0

Triple Display

Intel Celeron N3150 inside

Bezel Mount

Shock & Vibration Tested

Modular Design

True Flat Screen

Fanless System

WIFI Module (optional)

IP65 Front Bezel

VESA Mount

Giga-bit Ethernet

Dual GbE

CE **FCC** **RoHS**

Model: QPC1500N


**IP65 Front Panel PC with True Flat Screen
Fanless (Modular Detachable Rear PC) N3150
Industrial Panel PC 15"**

Display	
LCD	15" TFT XVGA
Resolution	1024*768, 16.2M Colors
Luminance (cd/m ²)	250
Viewing Angle	80°
Backlight Lifetime	50,000 hrs/ LED

Mechanical	
Construction	Heavy-duty steel chassis(Black Color), Aluminum Front
Operation Temp.	32°F ~ 122°F (0°C ~ 50°C) with Ambient Air
Storage Temp.	-22°F ~ 175°F (-30°C ~ 80°C)
Relative Humidity	10-90% @40°C, Non-condensing
Vibration	5~17Hz, 0.1" double amplitude peak to peak, 1.5G acceleration peak to peak
Shock	10G acceleration peak to peak (11ms)
Rating	IP 65 compliant front bezel
Qualification	Formal certification CE / FCC Class B
Mounting	Bezel / VESA 100 mount / Wall
Dimension	290mm*355mm*70mm(L*W*H)
Packing Dimension	460mm*459mm*174mm(L*W*H)
Weight (net)	N.W.: 9.68 lb (4.4kg), G.W.: 12.98lb (5.9kg)

Optional Order	
Memory	DDRIII-L 1GB, DDRIII-L 2GB, DDRIII-L 4GB, DDRIII-L 8GB
Storage	2.5" SATA HDD 320G, SSD/mSATA 16G~128G
OS	Microsoft Windows 7/8.1/10, POSReady7
Wifi Lan	RTL8188CUS-BC8-WB

System	
Processor	Intel Celeron Braswell Quad Core 6W 1.6GHz
System Memory	One 204 Pin 1.5V DDRIII-L SODIMM Socket, total up to 8GB
Storage	2.5" SATA HDD or mSATA SSD
I/O	Serial port *3 (RS232/422/485 *1, RS232*2)
	USB *5 (USB 3.0*2, USB 2.0*3)
	Ethernet, PCI-e Gbe LAN *2, RJ-45
	HDMI 1.4a *1
	CRT VGA *1, DB-15
	Audio, Line out *1, Phone Jack
Expansion Interface	One Mini PCI Express Socket
	One Mini miniSATA Express Socket
Touch screen	10 Point Projected Capacitive Touch
OS Support	Microsoft Windows 7/8.1/10, POSReady7
Power Requirement	DC Jack, +12V~+24V Wide Range Input

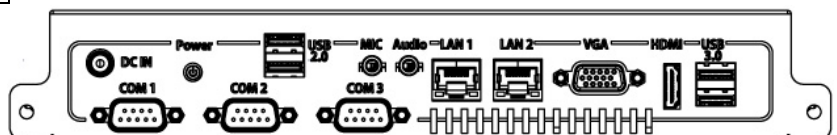

i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com

MECHANICAL DRAWING:

