

# SL-88-461

## Compact Backlit Industrial Keyboard

The SL-88-461 is designed to meet MIL-STD-461E specifications, making this keyboard suitable for surface ships, submarines, aircrafts and other space and ground systems used in military applications. This keyboard operates effectively around radios, transmitters and other susceptible equipment without creating adverse effects from conducted disturbances. The SL-88-461 offers a rugged keyboard and mounting holes for a secure fit in vehicles.



### Technical Specifications





Certifications	NEMA 4X UL60950, FCC Part 15 Class B
Shock	3x11 ms pulses of 50g on each of 3 axes
Cable	LENGTH: 4 ft coiled (1.2m)
Key Switch	MATERIAL: Industrial silicone rubber LIFE: 10 million cycles TRAVEL: 0.055 in. (1.4mm) ACTUATION FORCE: 7.05 oz +/- 1.06 oz (200g +/- 30g) FEEDBACK: Tactile with mechanical snap
Vibration	POWER SPECTRAL DENSITY: 0.04g/Hz FREQUENCY RANGE: 20Hz - 2 kHz DURATION OF TEST PER AXIS: 3 hours
Power	PS2: 200mA@5V (from Keyboard port) USB: 200mA@5V (from CPU port)
Flammability	PRINTED CIRCUIT BOARD: 94 VO SILICONE OVERLAY: 94 HB INTERFACE CABLE: 94 VO
Compatability	PS/2: All Windows Operating Systems USB: All Windows and Macintosh OS
Temperature Range	STORAGE: -40C to +90C (-40F to +194F) OPERATING: -20C to +60C (-4F to +140F)
Weight	2 lbs +/- 0.10 lbs (0.91 kg +/- 0.05kg)
Warranty	1 year limited warranty
Humidity	100%
Dimensions	11.40" x 6.30" x 1.86" (w-h-d) 285.8mm x 158.8mm x 45.7mm
Model Numbers	

### Features and Benefits

- 10-Year Lifespan
- 88-Key Functionality
- Polycarbonate Case with Mounting Holes
- 12 Function Keys
- Green Backlit Keys
- USB and PS/2 configurations available

DATE	CHANGES	INTL	REV
08.27.09	Original	JB	1.0

# SL-88-461

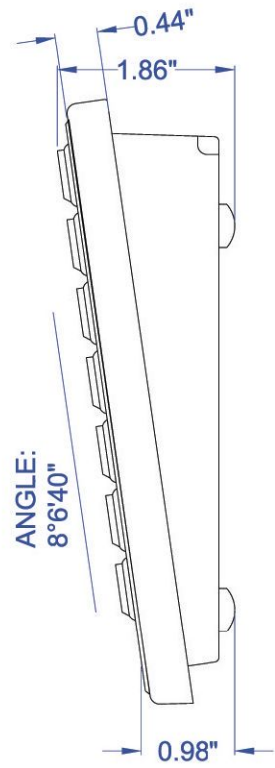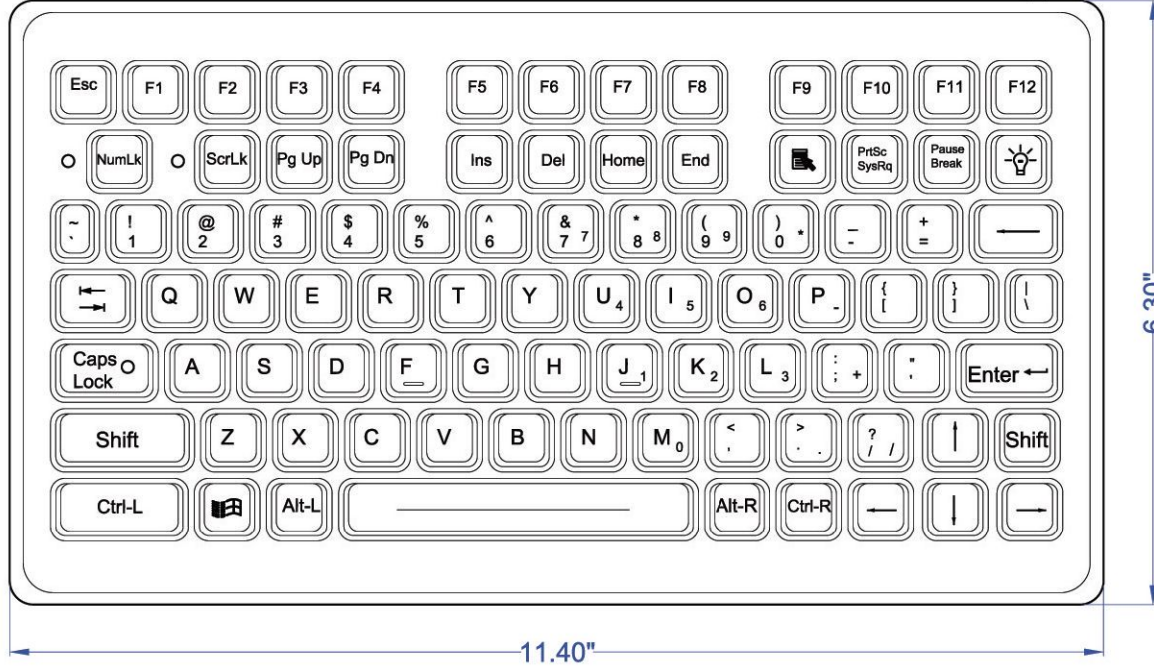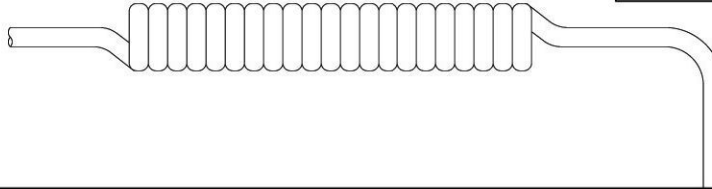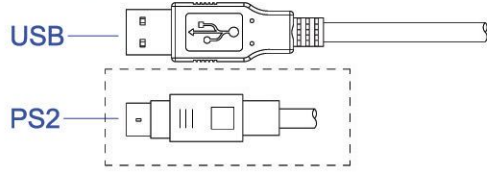

### KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

### POWER

PS2: 200mA@5V (from Keyboard port)  
 USB: 200mA@5V (from CPU port)

### TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

### HUMIDITY

100% Humidity Resistant

### VIBRATION

POWER SPECTRAL DENSITY: .04g<sup>2</sup>/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

### SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

### WEIGHT


2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

Part Number: SL-88-461	Drawing Number: MKT0218	Sheet: 1 OF 2
Drawing Title: SL-88-461-MKT	Revision: 1.0	Date: 08.27.09 JWB

# SL-88-461 BACK / MOUNTING

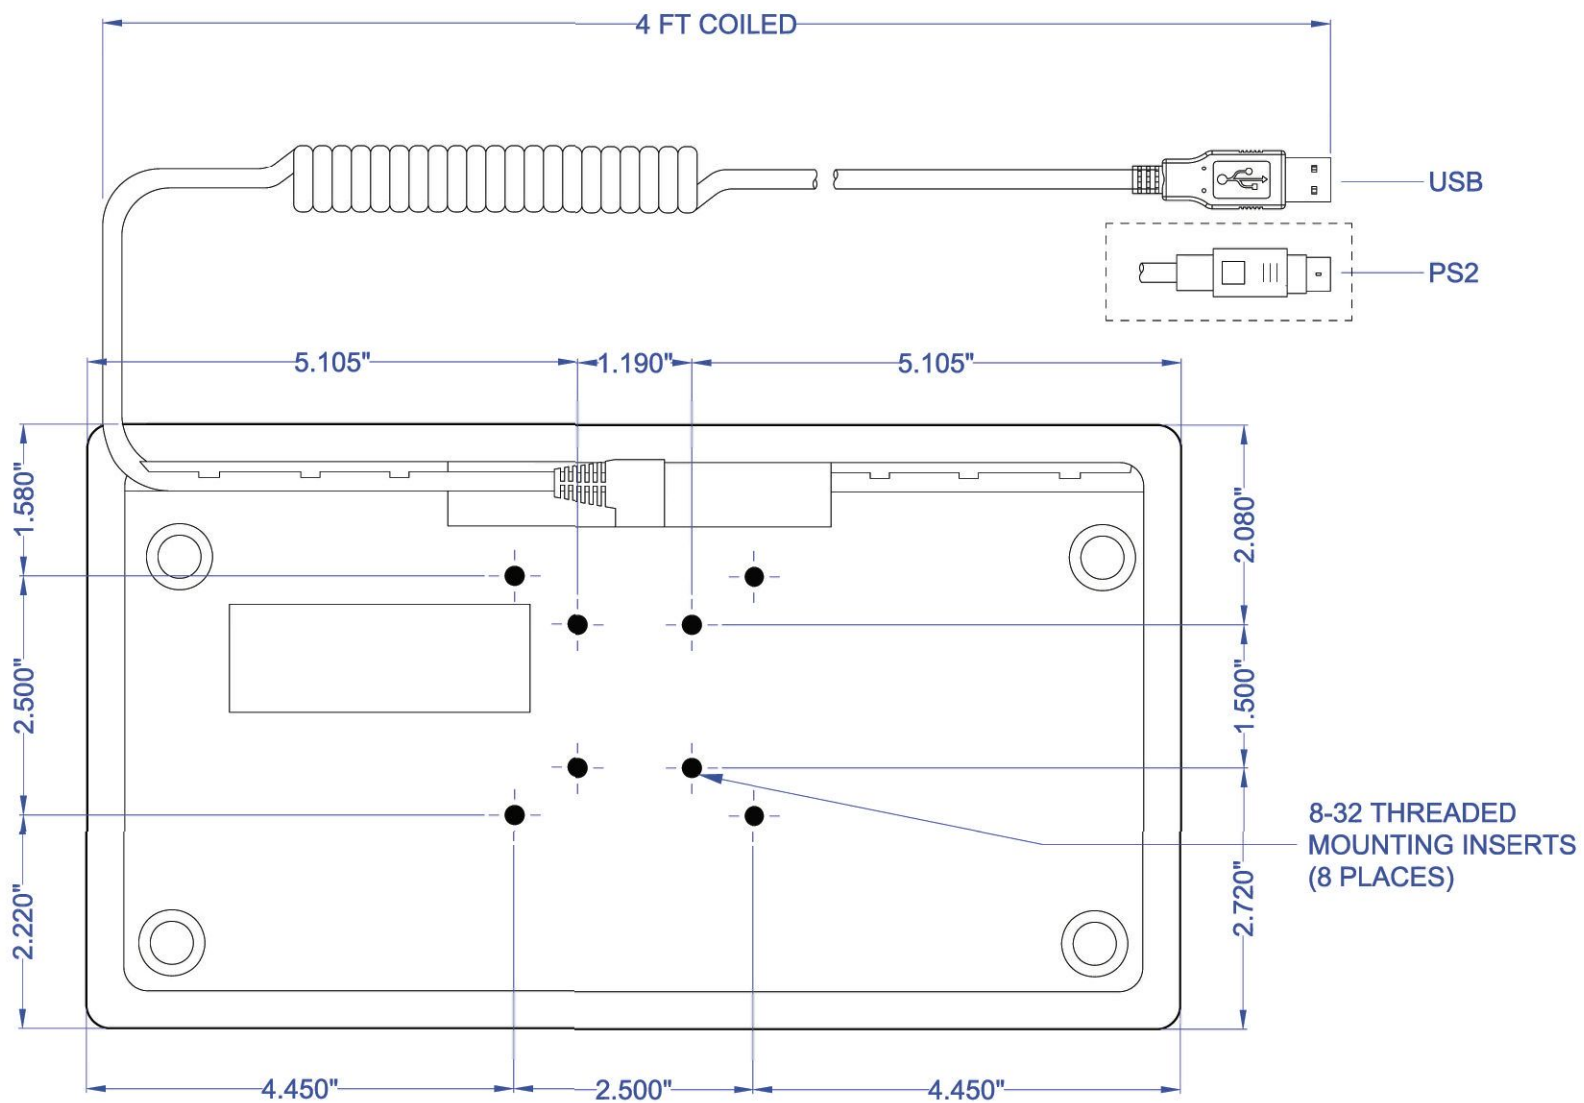

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

Part Number: SL-88-461

Drawing Number: MKT0218

Sheet: 2 OF 2

Drawing Title: SL-88-461-MKT

Revision: 1.0

Date: 08.27.09

JWB



Distributed by:

i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)