

# S-DL-Series 10.4" Panel PC

(AMD Geode LX-800 500MHz CPU)

Model no.: WCHC1040P1-A-DL

## System Specifications:

### TFT Characteristics

Pixel Number : 800 x 600  
 Brightness : 350 cd/m (typ.)  
 Contrast Ratio : 500:1 (typ.)  
 Viewable Angles : -60~60 (H);-60~40 (V)  
 Max Colors : 262,144 (6bits/colors)

### Environmental Considerations

Operating Temperature : 0 deg.C to 45deg.C  
 Operating Humidity : 30% to 90% (non condensing)



Chassis

### SBC Specifications

Processor : AMD® Geode LX-800 500MHz CPU  
 BIOS : Award 4Mbit Flash  
 System Chipset : AMD CS5536 Companion Device  
 Memory Slot : 1 x SODIMM, MAX 1GB DDR400  
 Graphic Chipset : AMD® Geode LX800 Integrated (64MB shared)  
 IDE : 1 x IDE (UDMA 100)  
 SATA : 2 x SATA 1.0  
 CF : 1 x Type I/II CF socket  
 KB / Mouse : 1 x PS/2  
 Ethernet : 1 x RJ-45(Realtek RTL8110 10/100 Mbps)  
 VGA : 1 x VGA Connector  
 Audio : Build in AC97 Codec  
 USB Ports : 4 x USB 2.0  
 Serial Ports : 3 x RS232, 1 x RS232/422/485  
 Expansion Slot : 1 x Mini PCI  
 Power Input : DC IN (Lockable, Power Jack)  
 Certifications : CE, FCC, RoHS

### Output Connectors

Ethernet LAN : 2 x RJ45-10/100 Mbps (Optional Giga LAN)  
 Keyboard / Mouse : 1 x PS/2  
 COM : 2 x RS232 9P DUSB (male)  
 USB : 2 x USB Type-A Receptacle  
 VGA Out : 1 x VGA 15P DSUB(female)

### Order Options

SBC	PANEL PC
CPU : AMD LX-800 500MHz*	Mechanical : Open Frame
RAM : 256 MB DDR*	Panel Mount (5mm bezel)
512 MB DDR(Optional)	IP65 (10mm bezel)
1 GB DDR(Optional)	Chassis
Storage : 2.5"40 GB HDD*	Touch : 5 Wires Resistive(Optional)
1 GB Compact Flash(Optional)	OS : Windows XPE(Optional)
* Default	Windows XP (Optional)
	Linux(Optional)

### Power Specification

Power Input Temperature : DC IN (Lockable, Power Jack)  
 Power Consumption : 12V, 23W (typ.)


### Accessories

External Power Supply 60W w/power cord  
 Y Cable for Keyboard / Mouse





Model no.: WCHC1040P1-A-DL

## Mechanical Design

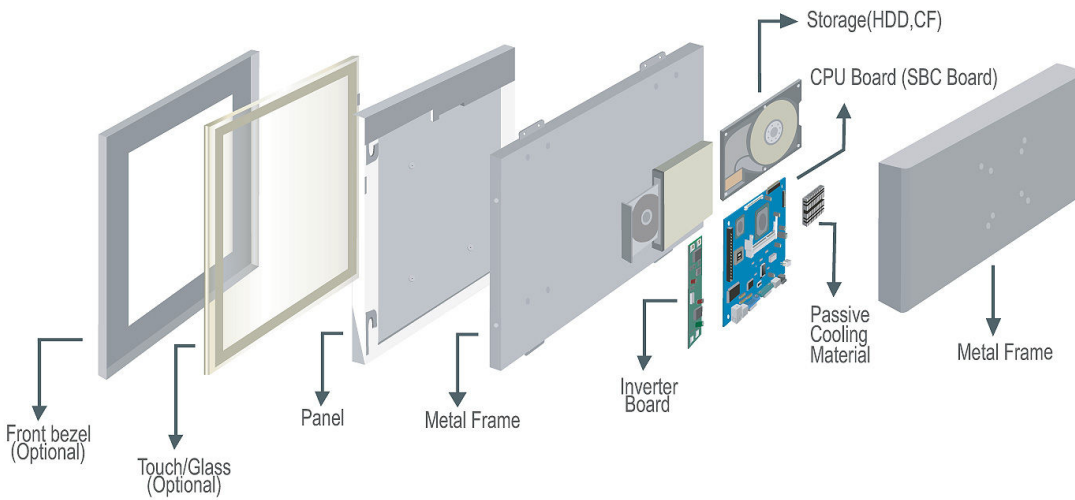

### Modularized Construction

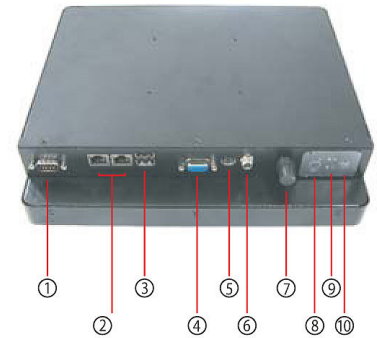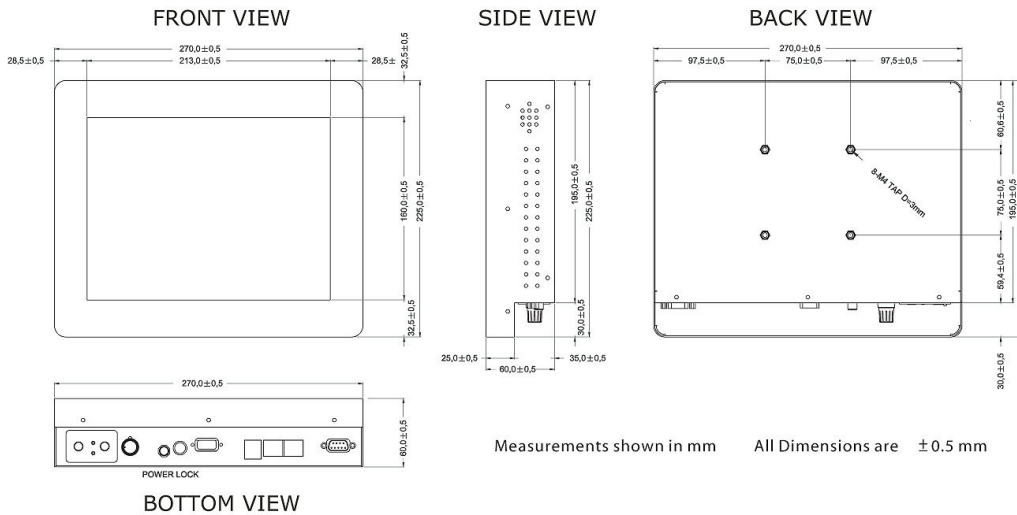

- |                 |                               |
|-----------------|-------------------------------|
| 1. RS-232 Conn. | 6. Power Lock                 |
| 2. RJ-45        | 7. Brightness Adjustment Knob |
| 3. USB          | 8. Power On Button            |
| 4. VGA Conn.    | 9. Power / HDD LED            |
| 5. PS/2         | 10. Power Reset Button        |

