

4K UHD Military Chassis LCD

32" 4K (3840 x 2160) UHD Military Display, 350nits, Contrast Ratio 1000:1, 89/89/89/89, VGA+DVI+HDMI Input with AR Protection glass

Model: WMCHW3200K



FEATURES:

- 32" Display with UHD 4K (3840 x 2160) native resolution for video display and other on-site applications
- Thin and compact design with impact resistant screen
- PCAP touch, optional AR glass
- Fanless and ventless design, easy to clean
- Compatible with existing imaging systems




SPECIFICATIONS

DISPLAY			
Resolution	3840x2160	Size	32.0 inches
Contrast Ratio	1000:1	Panel Brightness	350 nits 700 nits(Optional)
Display Color	1.07B Colors	View Angles	89,89,89,89
Touch / Glass	Projected Capacitive Multi Touch Screen AR Glass (Optional)		
ENVIRONMENT			
Operating Humidity	10% to 95% RH	Operating Temperature	0 ~ 50°C
Storage Temperature	10°C ~ 60°C		
CERTIFICATION			
Certification	CE, FCC		
MIL-STD 461E/F	RE101 / RE102 CE101 / CE 101 with EMI Glass / Touch(Optional) RS101 / RS 103 CS101 / CS 106 / CS 109 / CS 114 / CS 115 / CS 116	MIL-STD 810F/G	Vibration Method 514.5 Humidity Method 507.4 Transit Drop Method 516.5
IO PORTS			
USB Port	1 x USB for Touch	Video	1 x VGA 1 x DVI 1 x Display Port 1.2 1 x HDMI 1.4 (Optional) 1 x HDMI 2.0 (Optional)
Serial Port	1 x RS232 for Remote Control (Optional)	Audio	1 x Audio Line In
MECHANICAL			
Dimension	777.58 x 477.62 x 48 mm	Mounting	VESA Mount/ Rack Mount
Enclosure	Metal	Cooling System	Fanless Design
Accessory	User Manual(Hardcopy) VESA Mounting Screws (M4 x10 /M4 x 12) Power Cord 1.8M AC Adaptor Power Convert Cable VGA Cable 1.8M(Male to Male) Dual Link DVI Cable 1.8M (Male to Male) COM Cable 1.8M (Male to Female)	Optional Accessory	USB cable for Touch (Optional)
POWER			
Power Rating	24V DC in		

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS UNIT: MM

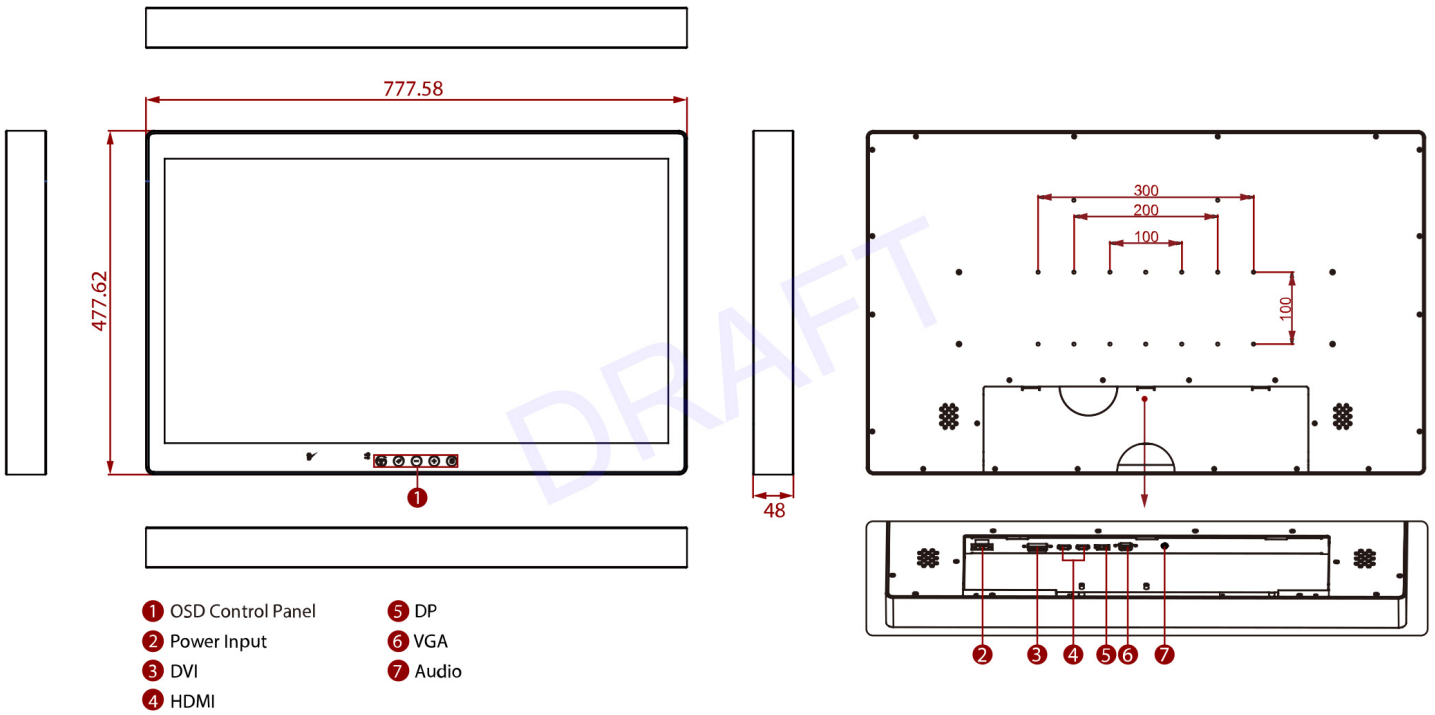

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.