

Open Frame LCD




Specifications

Model Name	WOPW1900M3
Viewable Size image	19" Wide(16:10)
Active Display Area (mm)	408.2(H)x255.2(V)
Pixel Pitch(mm)	0.284X0.284
Number of Pixels	1440x900
Contrast Ratio	1000:1 (typ.)
Display Color	16.7M(6bit/FRC)
Brightness(cd/m2)	250(typ.)
Viewing Angle(CR>=10)	-85~85(H);-80~80(V)
Synchronization Range (Horizontal / Vertical)	31.5~60.0KHz/60~75Hz
Recommended Resolution	1440x900@ 60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	23W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	5-Wire Resistive Touch



Remarks: WOPW1900M3 series= VGA input only
 WOPW1900M3AV series= VGA+Video Input

MECHANICAL DRAWING

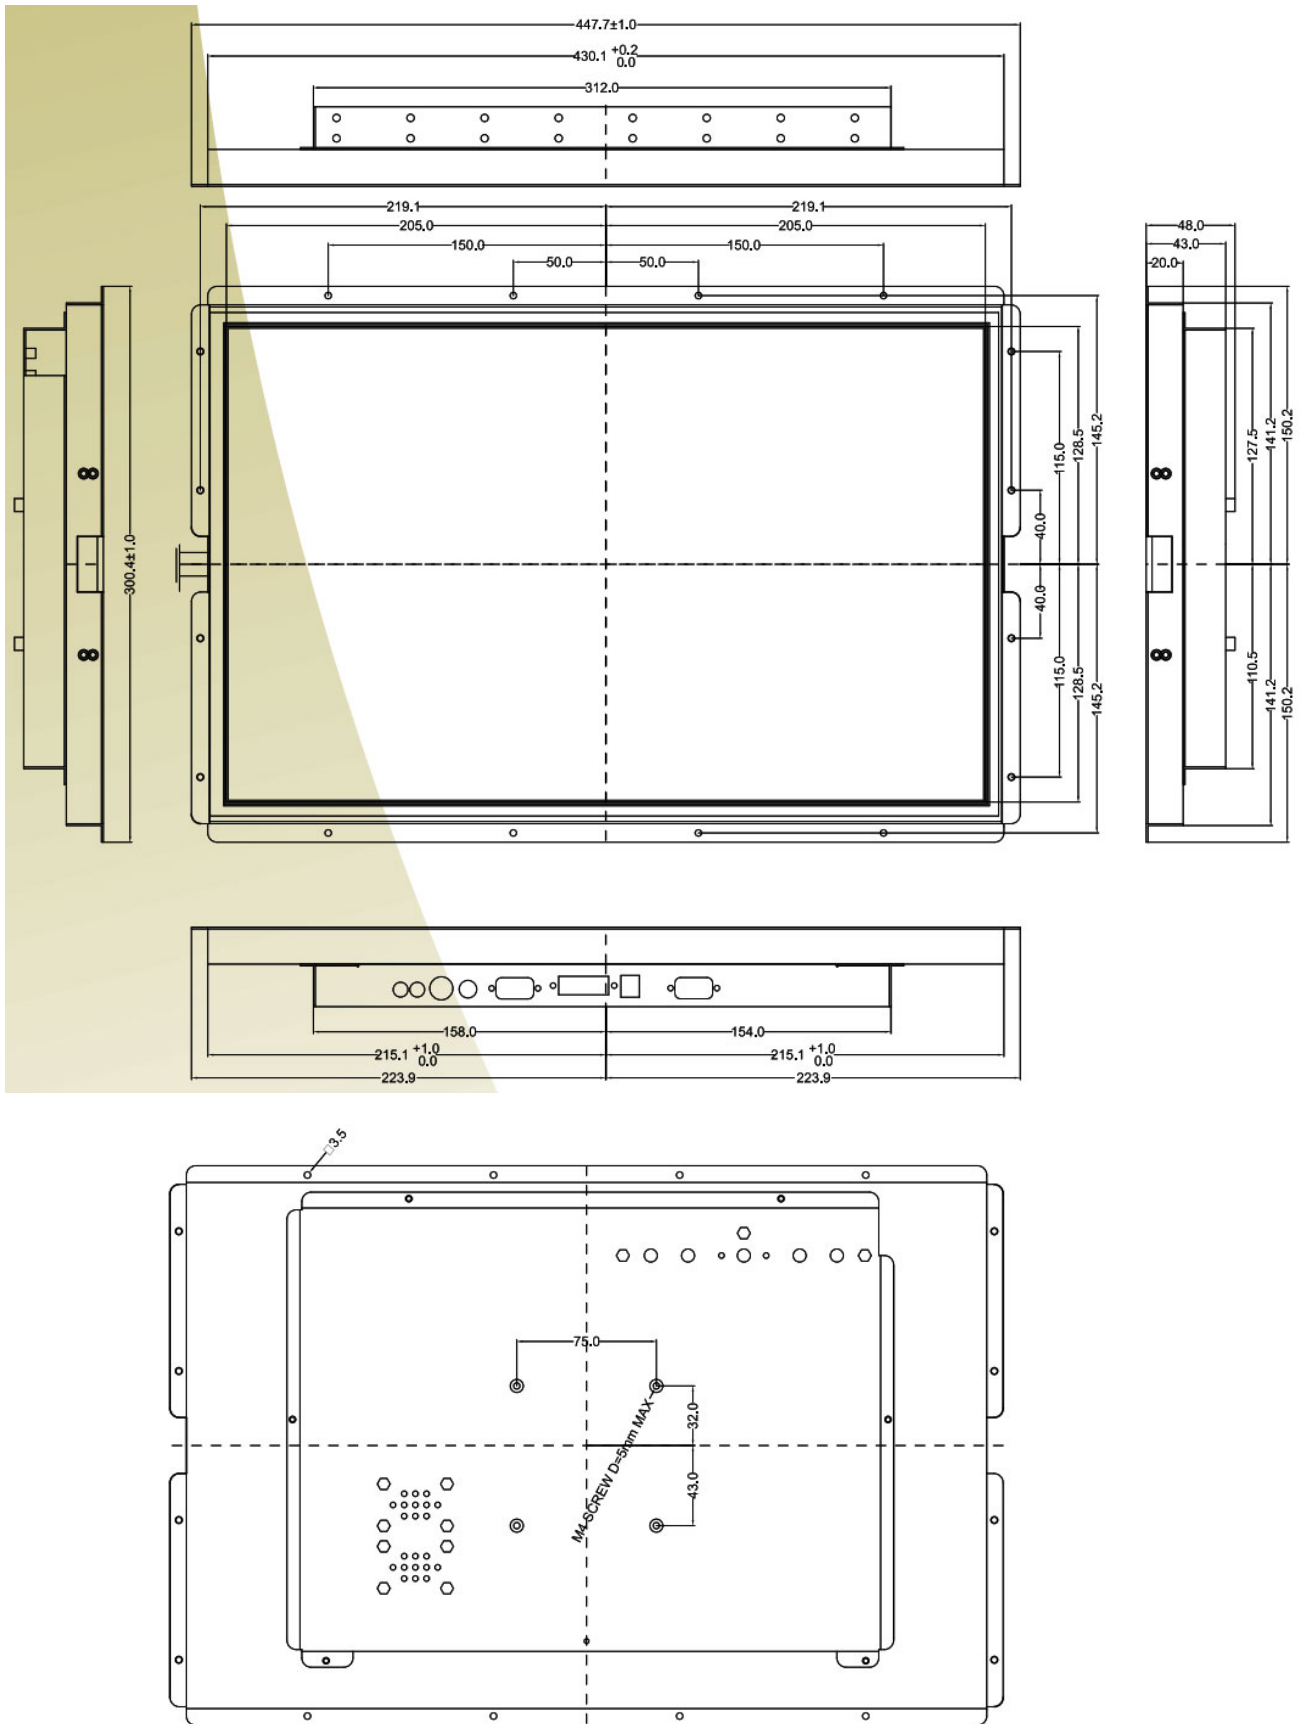

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

