




Open Frame LCD

Specifications


| | |
|--|--------------------------------|
| Model Name | WOPW4200L1 |
| Viewable Size image | 42"(16:9) |
| Active Display Area (mm) | 930.25(H)x523.01(V) |
| Pixel Pitch(mm) | 0.227x0.681 |
| Number of Pixels | 1366x768 |
| Contrast Ratio | 1000:1 (typ.) |
| Display Color | 16.7M(8bit/colors) |
| Brightness(cd/m2) | 500 (typ.) |
| Viewing Angle(CR>=10) | -89~89(H); -89~89(V) |
| Synchronization Range (Horizontal / Vertical) | 31.5~60.0KHz/60~75Hz |
| Recommended Resolution | 1366x768@60Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | AC100~240V, Universal, 10% |
| Power Consumption | 220W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Saw |



Remarks: WOPW4200L1 series= VGA input only
WOPW4200L1AV series = VGA + Video Input

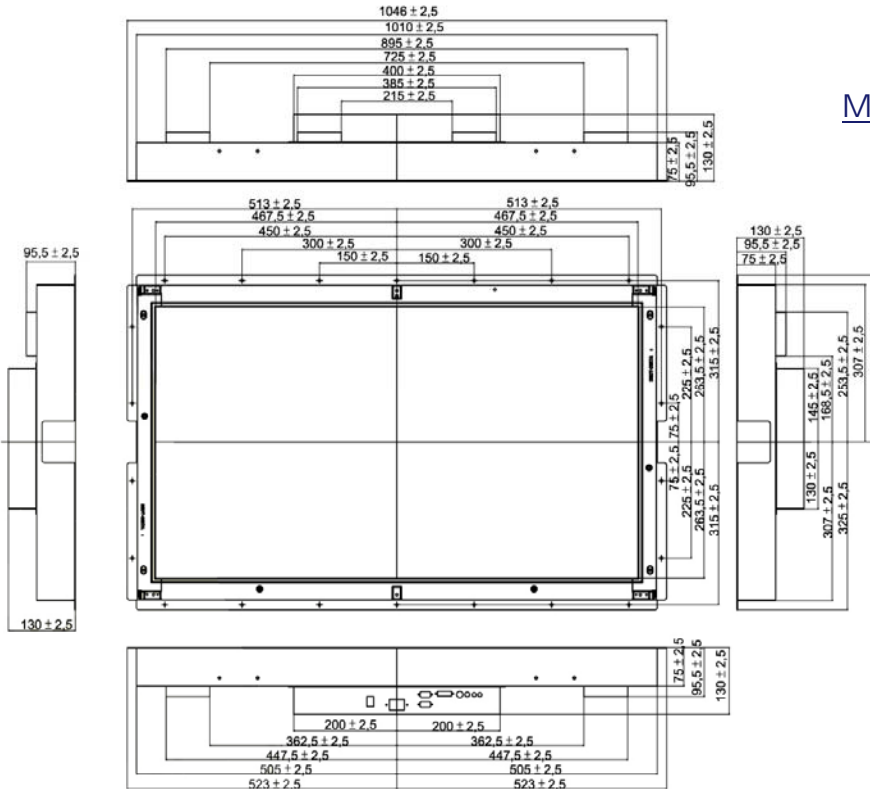

MECHANICAL DRAWING

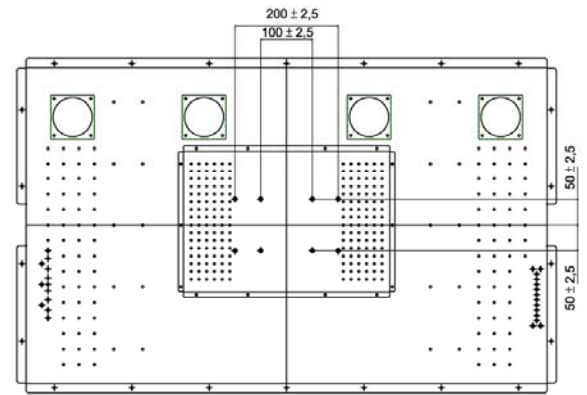

UNIT:mm