

High Brightness Industrial Display Chassis LCD (On-Camera / Crane Jib LCD)



Sunlight Readable/ High Brightness Industrial Chassis/Wall Mount Metal Housing for On-Camera/Crane LCD Monitor Kit, 15.6" LCD monitor, 1366 x 768, 1000nits LED Backlight, VGA+HDMI+3G SDI Input (Looping in and out), Side OSD, 2) 9~36VDC water proof Connector facing down.

Model: ECHW1560CC-SDI

Features:


- Outdoor Broadcast Jib high brightness LCD monitor
- Membrane "+" & "-" Front OSD Direct control backlight brightness from nearly 0% to 100%
- High brightness/Sunlight Readable LED 1000nits panel
- 9 to 36V DC power input with M12 Lock connectors
- Video input: HDMI, VGA, CVBS-in(BNC)x2, CVBS-looping(BNC)x2, Audio,
- 3G SDI Input (Looping in and out)
- Rear VESA Mounting
- Built in Speakers
- Optional RS232 remote monitoring
- Optional of Resistive/Capacitive/SAW/PCT touchscreen /
- Optional of 3mm/6mm (Safety) AR protection glass
- Optional M12 Plastic Water proof connectors.
- Optional for 90-260V AC input
- Optional for Protective Anti-Reflective AR glass

Specification:

Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating Wide /	
	Aspect Ratio / Size	15.6" viewable diagonal area	
	Active Area / Pixel Pitch	344.232(H) x193.536(V) mm / 0.2588(H) x 0.2588(V) mm	
	Native Resolution / Colors	1366(H) x 768(V) / 16.7M	
	Brightness / Contrast	1000 cd/m ² (typ) / 500: 1	
	Response Time	≤ 8ms	
	Viewing Angle (typical)	H. 90 ° (- 45° ~ + 45°) , V. 50 ° (- 30° ~ + 20°)	
	Light Source	LED , Long life, 50,000 hrs (typ)	
Input Sources	PC System	Signal	Analog RGB (0.7/1.0 V _{p-p} , 75 ohms)
		Sync	Separate Sync, Composite Sync, Sync On Green
		Frequency	F _h : 30 - 82Khz , F _v : 50 -75Hz
	Audio System	2W speaker x 2	
Input Terminals	1 x VGA (15 Pin Female D-Sub) , 1 x PC Audio (Stereo Headphone Jack) , 1 x AC Inlet		
Convenient Features	Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B)		
	OSD Multi-Languages , Wall Mount Ready (VESA 75 x 75 mm)		
Power	Internal power supply with universal / Auto-Sensing, AC 90 to 260V, 50 / 60 Hz		
Power Consumption	Operation / Power Saving	28 watt , < 1 watt (Support DPMS)	
Operating Condition	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)	
Storage Condition	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F) , 10% ~ 90% (no condensation)	
Certification	FCC , CE		
Dimensions	Physical	With Base(W x H x D) : TBD	
		Without Base(W x H x D) : 387.4 x 243.0 x 58.0 (mm)	
	Carton	W x H x D = TBD	
Weight	N.W. / G.W.	4.5 Kgs / 5.5 Kgs	
Container Loaded	20ft / 40ft / 40ft HQ	TBD (Sets , By pallet)	

Options	Touch	Video / TV	Enhanced Panel	Others
	Resistive touch	SV + AV	Panel with LED backlight	Digital Signage(Stand alone)
	Capacitive touch	SV + AV + AV Looping	High brightness panel	Networking Digital Signage
	SAW touch	SV + AV + TV	Wide Temperature	Motion Sensor
	Infrared touch		Sunlight Readable	Light Sensor
	Protected glass			Auto-Dimming

Mechanical Drawing:

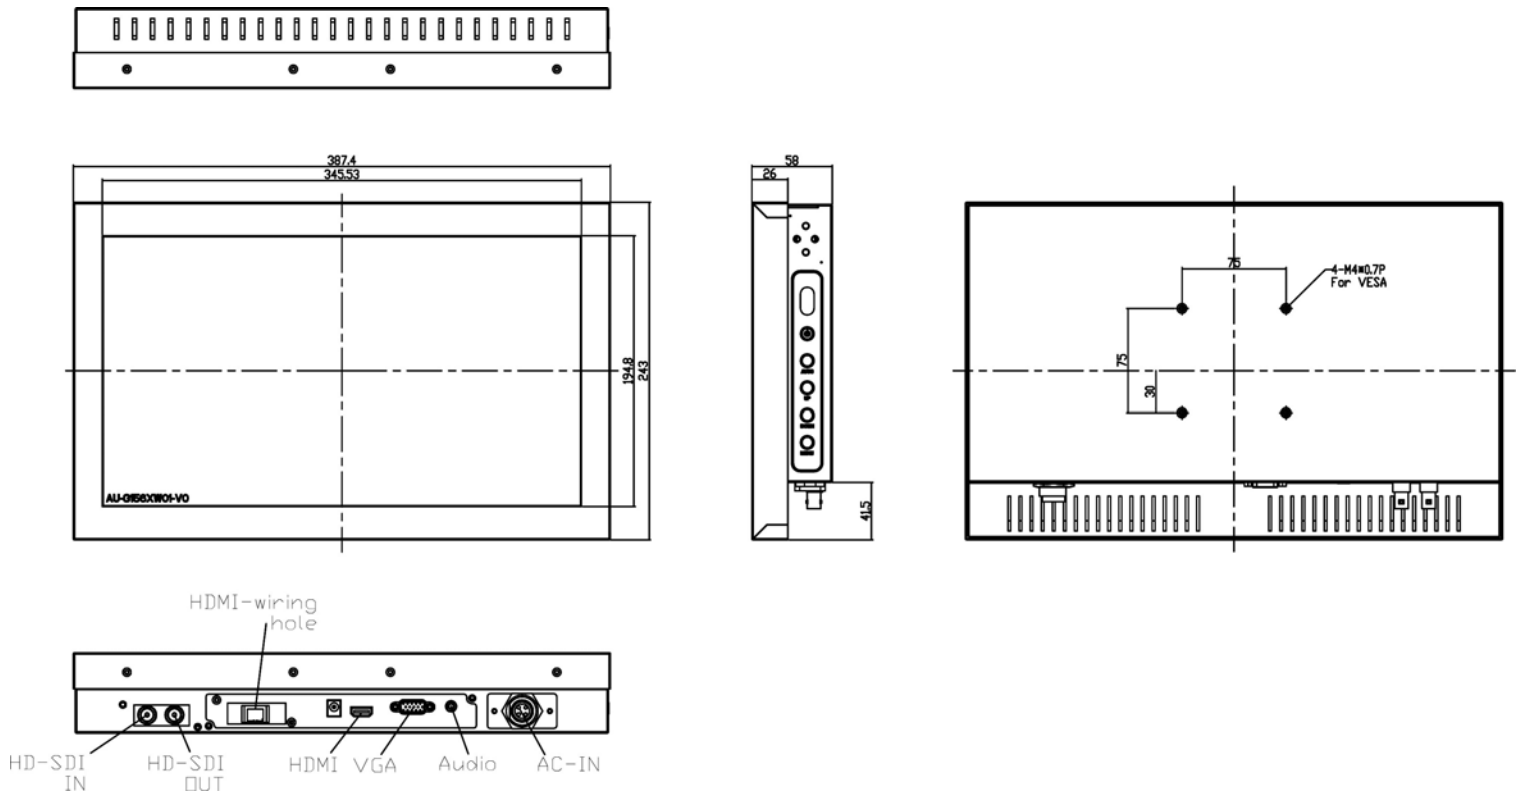

Model: ECHW1560CC-SDI

