


Model: EMC1210WT-i5

Panel PC IP65 Front 12.1" LCD Monitor, Intel® Core™ H61 i5-2390T Processor 3.5 GHz

Features:

- 12.1" LCD panel, 800 x 600, 350 nits
- Intel® Core™ i5 Processor
- Intel® QM57
- 2 x DDR3 SO-DIMM Up to 8GB 800/1066 MHz SDRAM
- 1 x VGA, 1 x DVI, 6 x USB, 2 x COM, 2 x LAN
- 1 x PS2, Mic-in, Line-in, Line-out

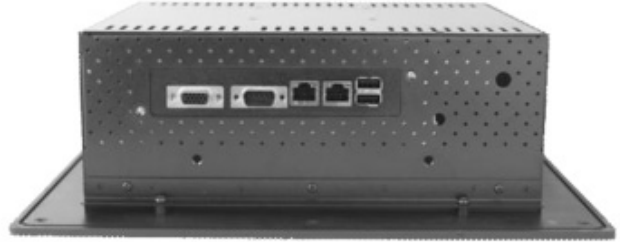

Specification:

Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating
	Aspect Ratio / Size	4 : 3 / 12.1" viewable diagonal area
	Active Area / Pixel Pitch	246.0(H) x 184.5(V) mm / 0.3075(H) x 0.3075 (V) mm
	Native Resolution / Color	800(H) x 600 (V) / 262 K
	Brightness / Contrast	350 cd/m ² (typ) / 600:1
	Response Time	≤ 35 ms
	Viewing Angle (Typical)	H. 178° (- 89° ~ + 89°) , V. 178°(- 89° ~ + 89°)
	Light Source	LED, Long life, 35,000 hrs (typ)
System	CPU	Intel® Core™ i5 Processor; FSB 1066MHz
	BIOS	AMI
	System / Graphic Chipset	Intel® QM57 / HD Graphics Integrated
	System Memory	2 x DDR3 SO-DIMM Up to 8GB 800/1066 MHz SDRAM
	HDD	6 x SATA
	I/O Ports	1 x VGA, 1 x DVI
		6 x USB
		2 x COM
2 x LAN		
	1x(K/B and Mouse)	
	Mic-in, Line-in, Line-out	
Expansion	1 x Mini PCI-e	
Power	Power Input	DC 12V
	Power Consumption	35 Watt, <1 Watt
Environmental	Operating Temperature	-30°C~80°C (-22°F~176°F), 10%~90% (non condensation)
	Operating Humidity	0%~95%(non-condensing)

Options	Touch	Enhanced Pane	Other	
	Resistive(With Glass)	High Brightness Panel	WiFi	Networking Digital Signage
	Capacitive	Panel-LED Backlight	3G	Web Cam
	SAW	Wide Temperature	Bluetooth	Motion Sensor
		Wide Viewing Angle	RFID	Auto LightSensor
		Sunlight Readable		Auto-Dimming

Mechanical Drawing:

