

## Model: NW117HD-S8 / NW117HD-S16 Series

1U 17" widescreen Full HD 1920 x 1080 LCD console drawer with 104 key notepad keyboard w/ touchpad (e) or trackball (b), Integrated with PS/2 and USB combo 8/16ports KVM includes 8pcs 6ft long NE6 Cables 22.8" Deep only and 35lbs



NW117HD-S8 / NW117HD-S16



### LCD Drawer & KVM Benefits

- 1U 17" widescreen LCD console drawer with VGA and DVI-D
- Support Full HD with 1080p resolution
- 104-key keyboard with either touchpad or trackball
- SUN Micro or MAC keyboard options available
- New enhanced aesthetics with molded front handle
- Short depth design of 480mm ( 18.9" ) only
- Front USB port for device access ( USB Hub KVM only )
- 2 post rack mounting available

### Drawer Features & Options

- 3G / HD / SD-SDI Broadcast-grade input (w/ speaker)
- HDMI (w/ speaker) or Audio input
- 48V, 24V or 12VDC power

<b>LCD Panel</b>	
Diagonal size	17.3" widescreen TFT
Max. Resolution	1920 x 1080
Brightness (cd/m2)	400
Backlight	LED
Colors	16.7 M, 8-bit
Contrast Ratio (typ)	600 : 1
Viewing Angle (H/V)	160° x 140°
Active area (mm)	382 x 215
MTBF (hrs)	50,000
Signal input	VGA or DVI-D
Casing Color	Black ( PAL 9005 )
<b>Weight ( Single console )</b>	
Net	10.8 kgs ( 24 lbs )
Gross	15.8 kgs ( 34.8 lbs )
<b>Environmental</b>	
Operating	0 to 50°C Degree
Storage	-5 to 60°C Degree
Relative humidity	5-90%, non-condensing
Shock	10G acceleration ( 11 ms duration )
Vibration	5-500Hz 1G RMS random vibration
<b>Regulatory</b>	
Safety	FCC & CE certified
Environmental	RoHS2 & REACH compliant

Power	
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption	Max. 48 Watt, Standby 5 Watt
Product Dimensions ( Single console )	
Product	441.6 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch
Packing	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

### Console Cable

CV-6  
6 feet DVI-D console cable ( bundle )  
- DVI-D + USB, server end  
- DVI-D + DB15 ( USB KB & MS ), console port


NB-6  
6 feet VGA console cable ( alternative )  
- VGA + USB, server end  
- DB15 ( VGA, USB KB & MS ), console port

### Dimensions


Model	Product Dimension ( W x D x H )	Packing Dimension ( W x D x H )	Net Weight	Gross Weight
NW117HD-S	441.6 x 580 x 44 mm 17.4 x 22.8 x 1.73 inch	590 x 808 x 140 mm 23.2 x 31.8 x 5.5 inch	11.6 kgs (25.5 lbs)	17.5 kgs (38.5 lbs)

## Standard Keyboard



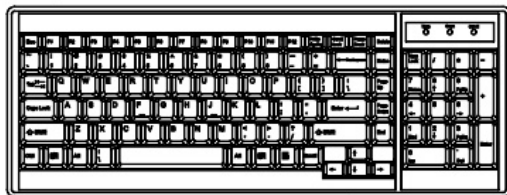



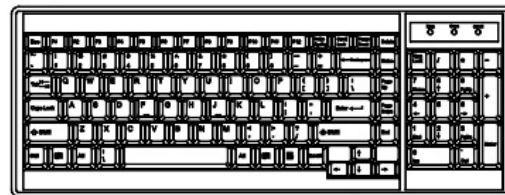









**Ge** G keyboard integrated with touchpad



**Gb** G keyboard integrated with trackball



### Supporting layouts

<b>America</b>					
	United States				
<b>EMEA</b>					
	United Kingdom	Germany	France	Spain	Norway
					
	Italy	Russia	Switzerland	Netherlands	Portugal
<b>Asia</b>					
	China	Japan	Korea	Arabia	Turkey

## Keyboard Options

\* US layout only

**Me** Mac keyboard with touchpad



**Se** S keyboard with touchpad

**Mb** Mac keyboard with trackball

**Sb** S keyboard with trackball



## KVM Selection

(X) Stands for 17" or 19" LCD size

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	NW11XHD-S - M118	NW11XHD-S - M1116	-
	1	1	2	NW11XHD-S - M218	NW11XHD-S - M2116	-
	1	1	0	NW11XHD-S - M018	NW11XHD-S - M0116	-
	1	2	0	NW11XHD-S - M028	NW11XHD-S - M0216	-
1	3	0	NW11XHD-S - M038	NW11XHD-S - M0316	-	


Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	NWIP11XHD-S - 82	NWIP11XHD-S - 162	-
	1	1	0	NW11XHD-S - CE8	NW11XHD-S - CE16	-
1	0	0	NW11XHD-S - S801	NW11XHD-S - S1601	-	

DVI-D KVM	Local	Remote	IP	12-port
	1	0	0	NW11XHD-S - D12


USB Hub DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	NWIP11XHD-S - 82H	NWIP11XHD-S - 162H	-
	1	1	0	NW11XHD-S - CE8H	NW11XHD-S - CE16H	-
1	0	0	NW11XHD-S - 801H	NW11XHD-S - 1601H	-	

## Mechanical Drawing

Front View

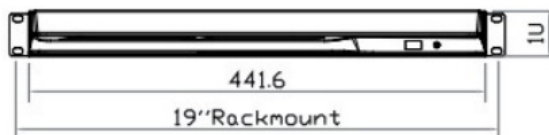

Side View



UNIT : mm  
1mm = 0.03937 inch

Top View

