CURVED LCD OPEN FRAME TYPE

43" 1500R Curved Touch monitor ("C" Curved) AD Board: 900F [DP+HDMI*2] PCAP Touch, Closed frame Metal, 500nits 3,840 x 2,160 [UHD]

MODEL: JOPC4300-PCT

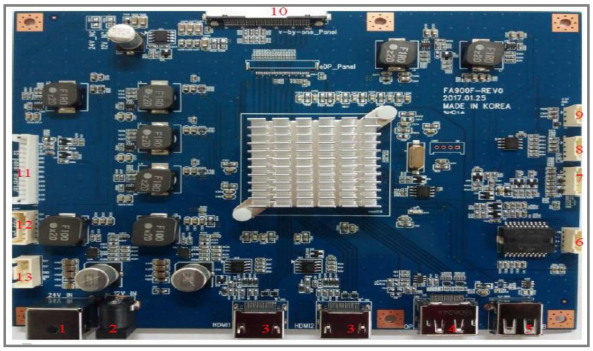

FEATURES:

- **42.51" Diagonal Active Area**
- **Resolution: 38420x2160 QWUXGA**
- **Support LCD TV, PCTV, Super Wide Viewing Angle**
- **Fast Response Time**

SPECIFICATION:

Active Screen Size	925.9 (941.184) mm (H) x 529.416 mm (V)
Display format	43inch Edge LED Curved (1500R, "C" Type)
Outline Dimension	1009.1 mm (H) x 642.6 mm (V) x 162.63 mm (D)
Pixel Pitch	0.2451 mm x 0.2451 mm
Pixel Format	3,840 horiz. by 2,160 vert.
Interface	V BY One interface
Color Depth	10Bit (D), 1.07Billon colors
Luminance, White	500 cd/m2 (Center 1-point) (Typ.)
Viewing Angle (CR>10)	Viewing Angle Free (R/L 178 (Min.), U/D 178 (Min))
Power Consumption	Total 73.32W (Typ.) (Logic=6.12W, LED Driver=67.2W)
Weight	20Kg (Typ)
Display Operating Mode	Transmissive mode, Normally black
Surface Treatment	Hard coating(3H), Anti-glare treatment of the front polarizer, Haze 1% (Typ.)
Touch Type	PCAP (5T, Black bezel)

AD Board	
Input resolution	Input Max Resolution Up to 3840x2160@60Hz
User Controls	OSD Buttons, *special function for IR/remote control, RS-232 It is designed to customer-request
Supporting LCD module	8Ch V-by-0ne or eDP UHD Panel
Input Power	12V / 24V or SMPS
Dimension	A/D Board : 140mm(W) x 170mm(H) OSD Board : 115mm(W) x 6.25mm(H)
Input Signals	HDMI(2.0)x2, Display Port(1.2a)
Audio Output	5Wx2

MECHANICAL DRAWINGS:

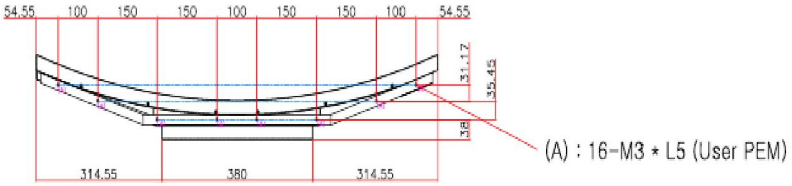

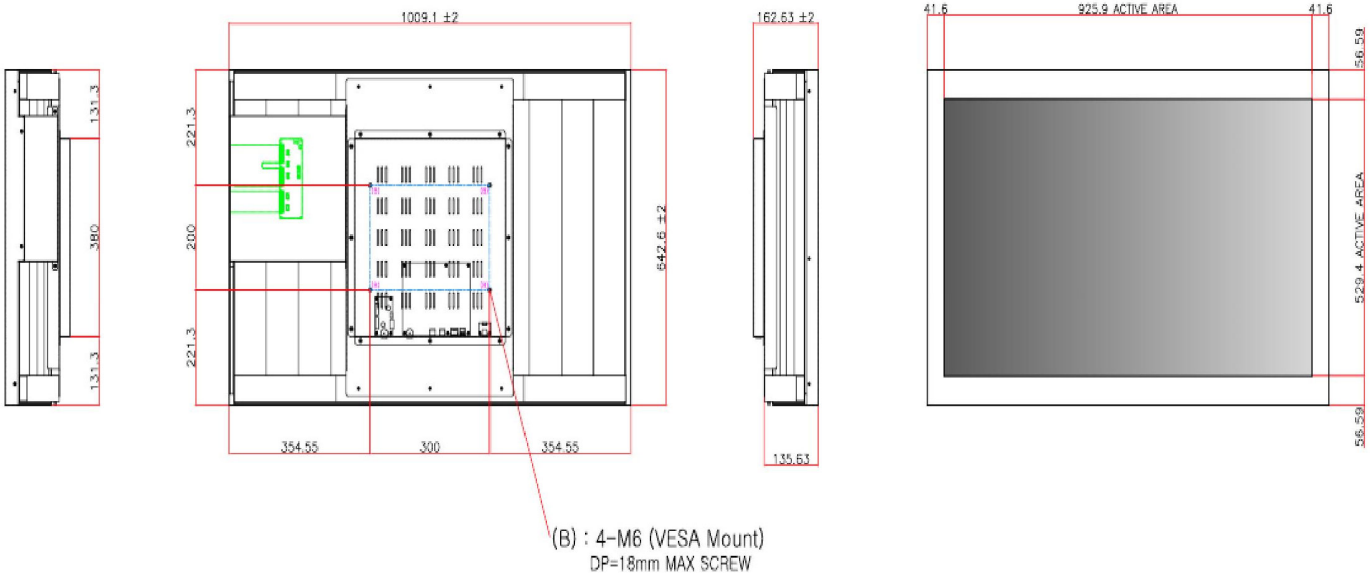

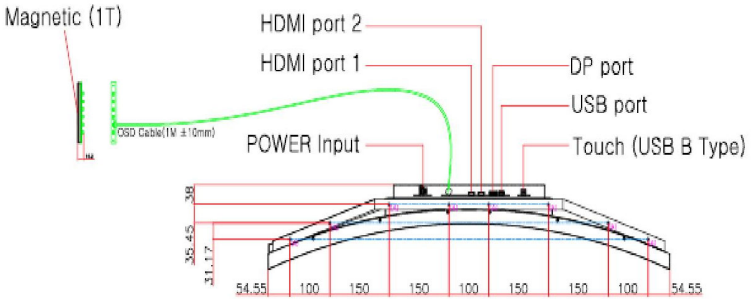

Unmarked tolerance in drawing will have ±1 variation