Digital Signage LCD Frame Advertising Media Player Commercial Grade Displays

Chassis Mount 32" Wide LCD Monitor
1920x1080, LED-350 nits, CF / SD / USB Plug and Play

Model: EDDW3200X

plug & play | landscape or portrait | scrolling text | image, video & music | secure input compartment | wide viewing angle

24/7 usage | high definition | HDMI | scheduling software | eco-friendly power timer | LED backlit

FEATURES:

- Digital Signage LCD Frame
- Commercial Grade LCD with Metal housing
- CF / SD / USB Plug and Play
- High Definition Resolution 1920 x 1080
- HD output 1080P
- LED backlit
- Play Video/Photo/Music
- JPG,MP3,MPG1/2/4,AVI ,DIVX
- Wide Viewing angle
- Auto-Play, Auto-repeat
- Support Timer to programming power on/off
- Support play list to specify files to play
- Support Programmable Photo Slide Timing
- Support Disconnection Memory to continuously play where it break
- Power Resume : Continue play the content from break point after power recover
- Power on password Setting
- Photo Rotation
- Full Function Remote Control
- Built in Speakers
- Optional High brightness 1000nits
- Optional Motion Sensors and Dimming Sensors
- Optional 6mm Vandal Proof Safety Glass
- Optional Stainless steel Front Bezel
- Optional Anti-Reflective AR 3mm Front Glass for protection

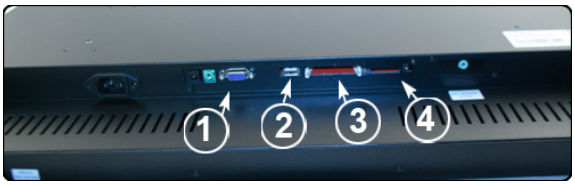

1. *VGA Output Port*
2. *USB Plugin*
3. *CF Plugin*
4. *SD Card Plugin*

Plug-n-Play Solution

Custom Digital Signage In 3 Easy Steps!

No Internet Connection Required.

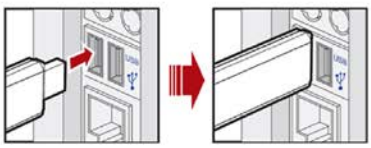

Metal Chassis/Housing for higher Impact protection. (Optional for Front AR Glass or Vandal Resistant glass)

Built In Speakers

Side OSD buttons can prevent unnecessary setting changes.

Auto Video Signal ON / OFF
Auto Always Power On

1. Save image or video file to USB
2. Plug USB/CF/ SD Card into player
3. Play on screen!

"These high-definition LED Displays are simple to use and are purpose built for commercial environments"

LCD SPECIFICATIONS:

Panel	*Cell Type / Glass Surface*	*TFT LCD / Black Anti-Glare, low reflection coating*
	Aspect Ratio / Size	*Wide / 32" viewable diagonal area*
	Active Area / Pixel Pitch	*698.4(H) x 392.9(V) mm / 0.3638(H) x 0.3638(V) mm*
	Native Resolution / Colors	*1920(H) x 1080(V) / 16.7Million*
	Brightness / Contrast	*350 cd/m² (typ) / 3000 : 1*
	Response Time	*≦ 8 ms*
	Viewing Angle (typical)	*H. 178o (- 89o ~ + 89o) , V. 178o(- 89o ~ + 89o)*
	Light Source	*LED backlight, Long life, 35,000 hrs (typ)*
Power	*Internal power supply with universal / Auto-Sensing, AC 90 to 260V, 50 / 60 Hz*	
Power Consumption	*Operation / Power Saving*	*145 watt , < 5 watt (Support DPMS)*
Operating Condition	*Temperature / Humidity*	*0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)*
Storage Condition	*Temperature / Humidity*	*- 20°C ~ 60°C (- 4°F ~ 140°F) , 10% ~ 90% (no condensation)*
Certification		*FCC , CE*
Dimensions	*Physical*	*W x H x D = 783 x 475 x 93 mm*
	Carton	*W x H x D = TBD*
Weight	*N.W. / G.W.*	*14.5 Kgs / 16 Kgs*
Container Loaded	*20ft / 40ft / 40ft HQ*	*TBD (Sets , By pallet)*

Options	*Touch*	*Video/TV*	*Enhanced Panel*	*Others*
	Resistive touch	*SV + AV*	*Panel with LED backlight*	*Digital Signage(Stand alone)*
	Capacitive touch	*SV + AV + AV_Looping*	*High brightness panel*	*Networking Digital Signage*
	SAW touch	*SV + AV + TV*	*Wide Temperature*	*Motion Sensor*
	Infrared touch		*Sunlight Readable*	*Light Sensor*
	Protected glass			*Auto-Dimming*

MEDIA PLAYER SPECIFICATIONS:

Video Function	*MPEG-1 video playback*
	MPEG-2 video playback
	MPEG-4 at full screen D1 video playback
	AVI
	Video Bandwidth -ASF simple profile 320 x 240 video
Photo Function	*Motion JPEG playback*
	JPEG photo playback
	Progressive JPEG photo playback
	Photo Bandwidth -
	Motion JPEG Maximum 10 fps
	JPEG minimum 16x16 pixels, Maximum 5120x3840 pixels
Audio Function	*MP3 music playback*
	DIVX
	WMA music playback
	AAC audio decode and playback
	Audio bandwidth - MP3 minimum 32Kbps, Maximum 256Kbps
Media Card Supported	*CF / SD / USB*
Convenient Features (By Remote Controller)	*Auto-Play, Auto-repeat*
	Support Timer to programming power on/off
	Support play list to specify files to play
	Support calendar
	Support Disconnection Memory to continuously play where it break
	Support auto copy content from USB disk to CF card with password
	Play/Pause , Stop
	Page up , Page Down
	Photo Zoom In/Out
	Photo Rotation
	Programmable Photo Slide Timing

Picture Mode to Display

Play list setting

Preferences Setting

Time and Date

Timer setting to weekly turn on/off power

MECHANICAL DRAWINGS:

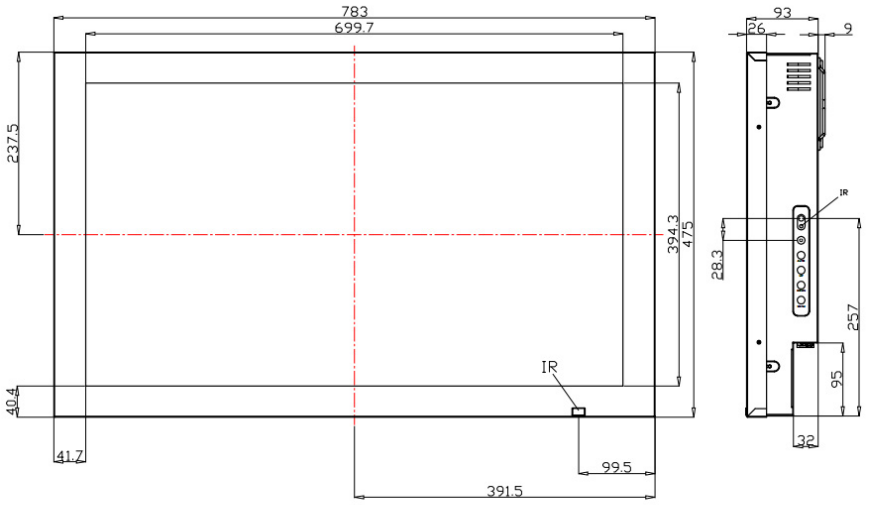

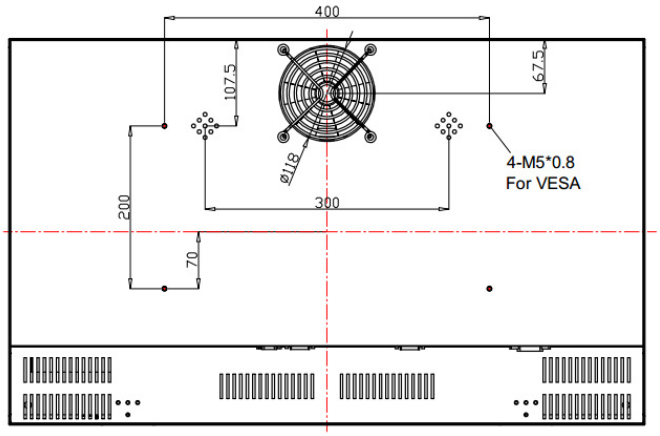

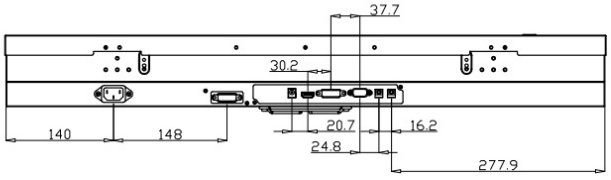

"These I/O are for references only, the actual power and video input might vary"

i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com